
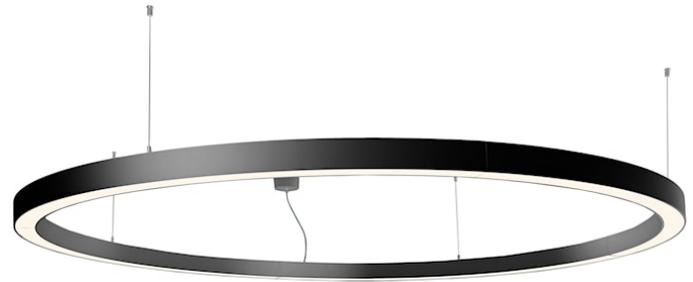


Nilo 1200 Direct/Indirect 4000K DALI EM Black

Code article 2050615


Concord

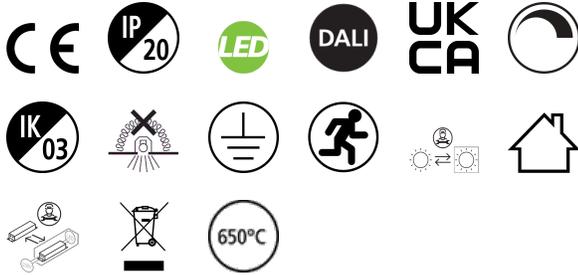

Nilo is a 360° curve-shaped luminaire with a striking, minimalistic design, perfect for retail, hospitality, and office environments. The product can be suspended at different heights to create appealing lighting effects. Stand-alone and self-contained lighting fixture. Aluminium body, opal diffuser, emits direct and indirect lighting. Textured black finishing colour. Light color temperature: 4000K, neutral white. System power: 88W Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation. DALI dimmable, 3-hours self-contained EMPRO self-test emergency, 220-240V / 50-60Hz 75% direct, and 25% indirect lighting. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: diameter 1140mm x 65mm. 3h emergency in function: direct lighting only, partial lighting (only direct and 1/4 of whole luminaire is light up in emergency mode), 200lm.

Atouts techniques


Dimensions (mm)

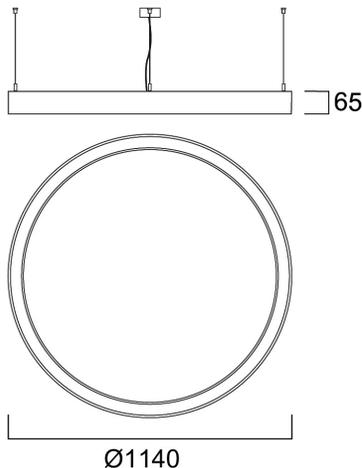

Photométrie

Distance [m]	Cone diameter [m]	E171	E190	E270	E371	E44	E58	E71	ILLUMINANCE [lx]
0.5	1.36 1.35	10641	82.1"	1107	82.4"	1133			
1.0	2.72 2.69	2660	82.1"	271	82.4"	312			
1.5	4.05 4.04	1132	82.1"	132	82.4"	155			
2.0	5.45 5.39	665	82.1"	85	82.4"	111			
2.5	6.81 6.73	429	82.1"	44	82.4"	48			
3.0	8.17 8.08	296	82.1"	31	82.4"	31			

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 106.8°)
 — C90 - C270 (Half beam angle: 107.4°)



Nilo 1200 Direct/Indirect 4000K DALI EM Black

Code article 2050615

Concord

Données générales

Nom du produit	Nilo 1200 Direct/Indirect 4000K DALI EM Black
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Suspended
Built in presence detector	NONE
General application	Hospitality, Museums & Galleries, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	9570
Luminaire efficacy (lm/W)	109
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 23
Photobiological Risk Group	RG0
Emergency duration (h)	3

Caractéristiques électriques

Consommation électrique totale (W)	88
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	7.0
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Drive current (mA)	1024
Courant d'appel (A)	31.2
Inrush Duration (µs)	182
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	14
Max. products per 13A C Breaker	18
Max. products per 16A C Breaker	45
Max. products per 16A B Breaker	27
Connectable conductor cross section - Max (mm ²)	2.5

Durée de vie

Lifespan L80 B20 | 50000

Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PMMA Acrylic
Nominal Product Height (mm)	65
Nominal Product Diameter (mm)	1140
Poids (kg)	8.2

Nilo 1200 Direct/Indirect 4000K DALI EM Black

Code article 2050615

Concord

Emballage

Product EAN number	5025768506156
Longueur simple de l'emballage (cm)	126.0
Largeur simple de l'emballage (cm)	126.0
Packaging single depth (cm)	14.9
DUN14 (inner)	05025768506156
Units per outer package	1
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	126.0
Packaging outer depth (cm)	14.9

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-25