


Solstice 200 1700lm 930 SSC01D GB

Code article 2070237

Concord

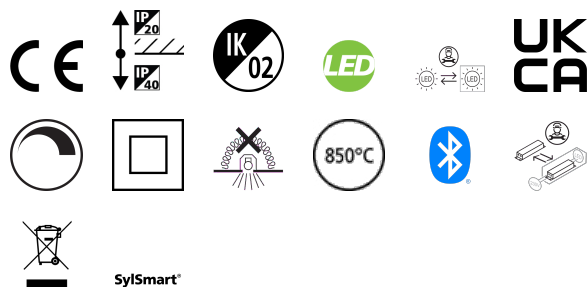

The Solstice 200 1700lm 930 SSC GB is a high efficient SSC GB dimmable downlight luminaire, Colour rendering index Ra>90, Colour temperature: 3000K Warm White, Class II, Protection rating IP40/IP20, Cut out dimensions: 200mm.

Atouts techniques

Dimensions (mm)




Photométrie

0.5	0.92	50°	39.5°	4210
		50°	39.5°	1020
1.0	1.64	50°	39.5°	1103
		50°	39.5°	280
1.5	2.46	50°	39.5°	490
		50°	39.5°	114
2.0	3.27	50°	39.5°	279
		50°	39.5°	64
2.5	4.09	50°	39.5°	179
		50°	39.5°	41
3.0	4.91	50°	39.5°	133
		50°	39.5°	30

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 75.6°)



Solstice 200 1700lm 930 SSC01D GB

Code article 2070237

Concord

Données générales

Nom du produit	Solstice 200 1700lm 930 SSC01D GB
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4262096
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	100
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 20
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	17
Actuel (A)	450
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	7
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
Minimum dimming level (%)	1
Drive current (mA)	450
Courant d'appel (A)	25
Inrush Duration (µs)	141
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	40
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	19
Max. products per 13A B Breaker	24
Max. products per 16A B Breaker	31
Max. products per 20A B Breaker	40
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	2.5

Solstice 200 1700lm 930 SSC01D GB

Code article 2070237

Concord

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	120000
Lifespan L80 B10	120000
Lifespan L90 B10	68000

Données physiques

Housing colour	RAL 9005 - Jet black
IP rating	IP40/20
IK rating	IK02
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Finition réflecteur	Other
Nominal Product Height (mm)	100
Nominal Product Diameter (mm)	215
Built-in diameter (mm)	200
Max. Lamp Diameter (mm) - D	215
Poids (kg)	1.5
Recessed Depth (mm)	150

Emballage

Product EAN number	5025768702374
Longueur simple de l'emballage (cm)	30.3
Largeur simple de l'emballage (cm)	30.3
Packaging single depth (cm)	18.0
DUN14 (inner)	05025768702374
Units per outer package	1
Packaging outer length / height (cm)	30.3
Packaging outer width (cm)	30.3
Packaging outer depth (cm)	18.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-10-40