
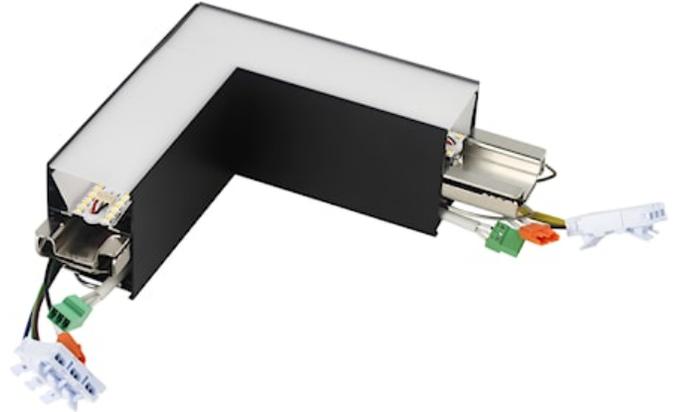


# OTAO LINEAR CORN-L OPAL 830/840 BK

Code article 0040809

**SYLVANIA**


**PRO**<sup>TM</sup>

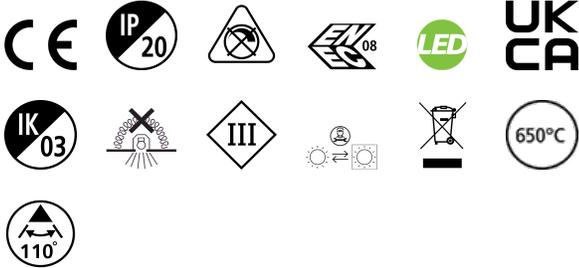

L-shape connection unit for opal diffuser version of Otao Linear range, RAL9011 (black) finishing, direct distribution, only 3000K/4000K LED light sources included, feed by next straight luminaire, shipped with 2x fast connectors and additional replacement electrical connectors, 50mm wide extruded aluminium profile, nominal size: 170x170x50x73mm.

## Atouts techniques

### Dimensions (mm)

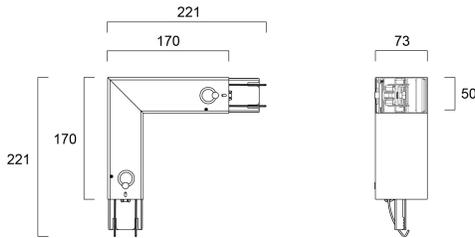

### Photométrie

# OTAO LINEAR CORN-L OPAL 830/840 BK

Code article 0040809

**SYLVANIA**

## Données générales

Nom du produit	OTAO LINEAR CORN-L OPAL 830/840 BK
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting, Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+50°C
Virtual assistant compatibility	N/A
ETIM Class	EC002556
Numéro virtuel FI	4170663
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	600
Luminaire efficacy (lm/W)	122
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	4.9
Primary Supply/Product voltage - min (V)	30.0
Primary Supply/Product voltage - max (V)	38.0
Electrical protection	Class III
Dimmable	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	DC

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B50	100000

## Données physiques

Housing colour	RAL 9011 - Graphite black
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Longueur (mm)	170
Largeur (mm)	50
Nominal Product Height (mm)	73
Poids (kg)	0.75

## Emballage

Product EAN number	5410288408095
Longueur simple de l'emballage (cm)	23.0
Largeur simple de l'emballage (cm)	8.0
Packaging single depth (cm)	23.0
DUN14 (inner)	15410288408092
Units per outer package	5
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	42.0

# OTAO LINEAR CORN-L OPAL 830/840 BK

---

Code article 0040809

**SYLVANIA**

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	5-50