


PRO



Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.94 1.00	0.70 0.75	2.30 2.46	5400 2443
1.0	1.67 2.01	1.20 1.50	3.94 4.92	2988 1188
1.5	2.51 3.01	1.70 2.25	5.58 7.24	1002 417
2.0	3.34 4.01	2.20 2.81	7.21 9.24	500 198
2.5	4.18 5.02	2.70 3.38	8.85 11.08	370 144
3.0	5.02 6.02	3.20 3.94	10.49 13.08	293 114

Distance [m] Cone diameter [m] Beam diameter [m] Beam diameter [ft] Illuminance [lx]
 — C0 - C180 (Half beam angle: 90.2°) — C90 - C270 (Half beam angle: 79.8°)

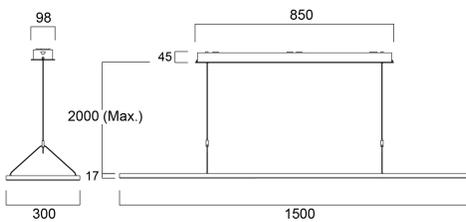