

# LIFESAFE PRO MULTIFIX EX SUS EM3 NM/MTDA

Code article 0038842

**SYLVANIA**


LiFeSafe



LiFeSafe PRO MULTIFIX EX SUS EM3 NM/MT DA is a DALI addressable LED ceiling suspended exit sign complete with six ISO7010 legends: Left, Right, 2 x Up and 2 x Down. Maintained or Non-Maintained, 3Hr emergency duration. Maximum viewing distance 28m. 0 to +35°C operating temperature range. IK02, IP20, Class II electrical construction, 6-year warranty.

## Atouts techniques

### Dimensions (mm)

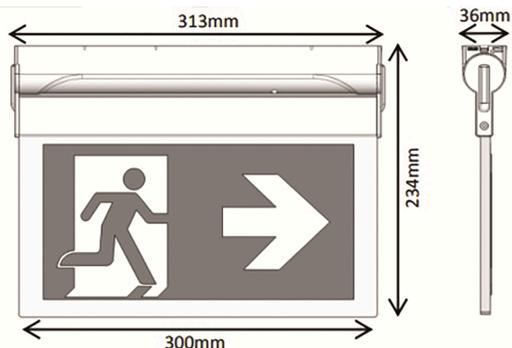

### Photométrie

# LIFESAFE PRO MULTIFIX EX SUS EM3 NM/MTDA

Code article 0038842

**SYLVANIA**

## Données générales

Nom du produit	LIFESAFE PRO MULTIFIX EX SUS EM3 NM/MTDA
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Wall surface mounted
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	0°C...+35°C
ETIM Class	EC001957
Warranty	6 years

## Données optiques

Fixture luminous flux (lm)	50
Luminaire efficacy (lm/W)	25
Photobiological Risk Group	RG1
Maintien du flux à la fin de la durée de vie nominale (lm)	70
Luminous flux (emergency) (lm)	50
Flux lumineux (d'urgence) (lm)	50
Emergency duration (h)	3

## Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Actuel (A)	0.017
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.52
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	61.2
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	LED driver constant current
Drive current (mA)	150
Courant d'appel (A)	18.4
Inrush Duration (µs)	3
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	200
Max. products per 13A C Breaker	280
Max. products per 16A C Breaker	280
Max. products per 20A C Breaker	280
Max. products per 10A B Breaker	200
Max. products per 13A B Breaker	150
Max. products per 16A B Breaker	150
Max. products per 20A B Breaker	150
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5
<b>Durée de vie</b>	
Lifespan L70 B10	59000
Lifespan L90 B10	20000

# LIFESAFE PRO MULTIFIX EX SUS EM3 NM/MTDA

Code article 0038842

**SYLVANIA**

## Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Longueur (mm)	313
Largeur (mm)	234
Nominal Product Height (mm)	40
Poids (kg)	0.71

## Emballage

Product EAN number	5410288388427
Longueur simple de l'emballage (cm)	37.0
Largeur simple de l'emballage (cm)	31.0
Packaging single depth (cm)	19.0
DUN14 (inner)	05410288388427
Units per outer package	1
Packaging outer length / height (cm)	37.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	19.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	0 °C-35
Utilisation pour applications sèches uniquement	Yes