

# ToLEDo NEOS T8 CCG L600 900LM 840 30K RL

Code article 0030230


**SYLVANIA**



Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes Lumen output - 900lm High lumen efficacy - 136 lm/W Switching cycles - 200,000X Average rated life 30,000 hours Lamp length - 600mm Wide beam angle Suitable for general illumination in offices, supermarkets, department stores, parking lots Suitable for operation with electromagnetic gears/CCG and direct mains operation (220-240V) 3-Year warranty

## Atouts techniques

### Dimensions (mm)

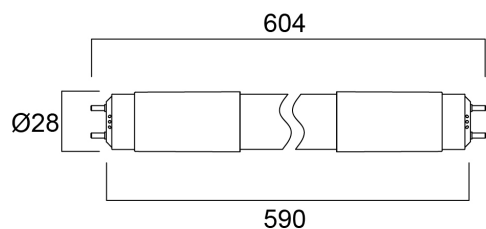

### Photométrie

# ToLEDo NEOS T8 CCG L600 900LM 840 30K RL

Code article 0030230

**SYLVANIA**

## Données générales

|                                  |                                                                 |
|----------------------------------|-----------------------------------------------------------------|
| Nom du produit                   | ToLEDo NEOS T8 CCG L600 900LM 840 30K RL                        |
| Technologie                      | LED                                                             |
| Lamp shape                       | Tube, double-ended                                              |
| Cap/Base                         | G13                                                             |
| Lamp finish                      | Frosted/Coated                                                  |
| General application              | Education, Logistics & Industry, Office, Residential & Consumer |
| Operating temperature range (°C) | -20°C...+45°C                                                   |
| Virtual assistant compatibility  | N/A                                                             |
| ETIM Class                       | EC001959                                                        |
| Numéro virtuel FI                | 4941335                                                         |
| Warranty                         | 3 ans                                                           |

## Données optiques

|                                 |            |
|---------------------------------|------------|
| Useful luminous flux (Φuse)     | 900        |
| Température de couleur (K)      | 4000       |
| Couleur de lumière              | Cool White |
| IRC (Ra)                        | 80         |
| Colour Variation Initial (SDCM) | SDCM6      |
| Beam Angle (°)                  | 170        |
| Photobiological Risk Group      | RG0        |

## Caractéristiques électriques

|                                          |         |
|------------------------------------------|---------|
| Power consumption (W)                    | 6.6     |
| Wattage (W)                              | 6.6     |
| Primary Supply/Product voltage - min (V) | 220     |
| Primary Supply/Product voltage - max (V) | 240     |
| Lamp power factor                        | 0.5     |
| Control gear required                    | No      |
| Dimmable                                 | No      |
| Courant d'appel (A)                      | 5.2     |
| Inrush Duration (µs)                     | 7       |
| Lamp Energy Label (class)                | D       |
| Nominal Frequency (Hz)                   | 50/60Hz |

## Durée de vie

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 30000 |
|------------------|-------|

## Données physiques

|                               |      |
|-------------------------------|------|
| IP rating                     | IP20 |
| Longueur (mm)                 | 589  |
| Nominal Product Diameter (mm) | 28   |
| Poids (kg)                    | 0.12 |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288302300  |
| Longueur simple de l'emballage (cm)  | 62.0           |
| Largeur simple de l'emballage (cm)   | 2.8            |
| Packaging single depth (cm)          | 2.8            |
| DUN14 (inner)                        | 15410288302307 |
| Units per outer package              | 10             |
| Packaging outer length / height (cm) | 68.0           |
| Packaging outer width (cm)           | 15.5           |
| Packaging outer depth (cm)           | 8.5            |

## Sécurité

|                                           |                                            |
|-------------------------------------------|--------------------------------------------|
| Condition de fonctionnement optimal (° C) | -20-45                                     |
| Consignes de nettoyage en cas de bris     | Not applicable                             |
| Lampe à objectif spécial                  | No                                         |
| Ne convient pas à l'éclairage résidentiel | Yes                                        |
| Safety message                            | Not Suitable for totally enclosed fixtures |