
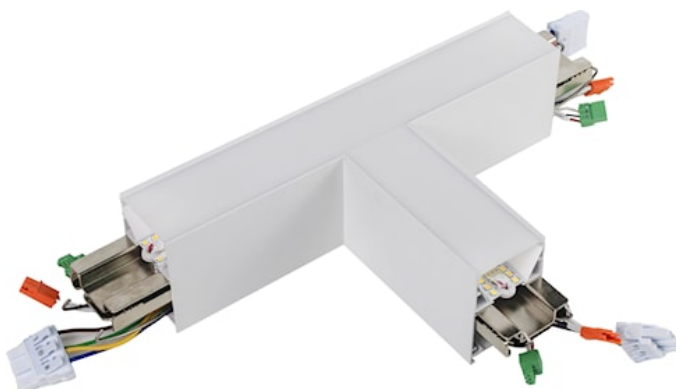


# OTAO LINEAR CORN-T OPAL 830/840 WH

Code article 0041810

**SYLVANIA**


**PRO**<sup>TM</sup>

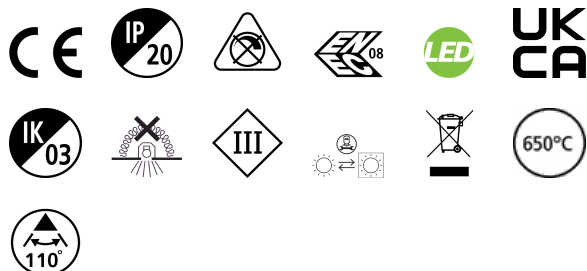

T-shape connection unit for opal diffuser version of Otao Linear range, RAL9003 (white) finishing, direct distribution, only 3000K/4000K LED light sources included, feed by next straight luminaire, shipped with 3x fast connectors and additional replacement electrical connectors, 50mm wide extruded aluminium profile, nominal size: 290x170x50x73mm.

## Atouts techniques

### Dimensions (mm)

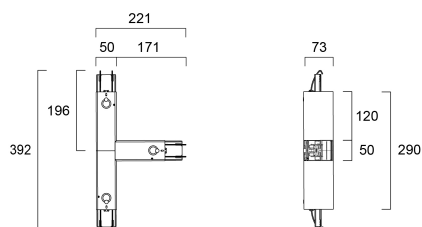

### Photométrie

# OTAO LINEAR CORN-T OPAL 830/840 WH

Code article 0041810

**SYLVANIA**

## Données générales

|                                  |                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------|
| Nom du produit                   | OTAO LINEAR CORN-T OPAL 830/840 WH                                                   |
| Technologie                      | LED                                                                                  |
| Cap/Base                         | N/A                                                                                  |
| Housing                          | Aluminium                                                                            |
| Montage                          | Ceiling recessed mounting, Ceiling surface mounting, Wall surface mounted, Suspended |
| Built in presence detector       | NONE                                                                                 |
| General application              | Office, Education                                                                    |
| Operating temperature range (°C) | 5°C...+50°C                                                                          |
| Virtual assistant compatibility  | N/A                                                                                  |
| ETIM Class                       | EC002556                                                                             |
| Numéro virtuel FI                | 4170599                                                                              |
| Warranty                         | 5 ans                                                                                |

## Données optiques

|                                 |                             |
|---------------------------------|-----------------------------|
| Fixture luminous flux (lm)      | 1050                        |
| Luminaire efficacy (lm/W)       | 140                         |
| Couleur de lumière              | Warm White or Neutral White |
| IRC (Ra)                        | 80                          |
| Colour Variation Initial (SDCM) | SDCM3                       |
| Beam Angle (°)                  | 110                         |
| Distribution type               | Symmetric                   |
| Glare control                   | < 28                        |
| Photobiological Risk Group      | RG0                         |

## Caractéristiques électriques

|                                                          |                                |
|----------------------------------------------------------|--------------------------------|
| Consommation électrique totale (W)                       | 7.5                            |
| Primary Supply/Product voltage - min (V)                 | 30.0                           |
| Primary Supply/Product voltage - max (V)                 | 38.0                           |
| Electrical protection                                    | Class III                      |
| Dimmable                                                 | No                             |
| Dimming method                                           | N/A                            |
| Energy Efficiency Class (A->G) of contained light source | C, C(more than 1 Light Source) |
| Nominal Frequency (Hz)                                   | DC                             |

## Durée de vie

|                  |        |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B50 | 100000 |

## Données physiques

|                             |                         |
|-----------------------------|-------------------------|
| Housing colour              | RAL 9003 - Signal white |
| IP rating                   | IP20                    |
| IK rating                   | IK03                    |
| Diffuser finish             | Opal                    |
| Diffuser material           | PC Polycarbonate        |
| Longueur (mm)               | 170                     |
| Largeur (mm)                | 50                      |
| Nominal Product Height (mm) | 73                      |
| Poids (kg)                  | 1.1                     |

## Emballage

|                                      |                |
|--------------------------------------|----------------|
| Product EAN number                   | 5410288418100  |
| Longueur simple de l'emballage (cm)  | 40.0           |
| Largeur simple de l'emballage (cm)   | 8.0            |
| Packaging single depth (cm)          | 23.0           |
| DUN14 (inner)                        | 15410288418107 |
| Units per outer package              | 5              |
| Packaging outer length / height (cm) | 42.0           |
| Packaging outer width (cm)           | 25.0           |
| Packaging outer depth (cm)           | 42.0           |

# OTAO LINEAR CORN-T OPAL 830/840 WH

Code article 0041810



## Sécurité

|                                           |      |
|-------------------------------------------|------|
| Glow Wire Test (°C)                       | 650  |
| Condition de fonctionnement optimal (° C) | 5-50 |