


START Surface Wall Cube IP54 2x140lm 2CCT Black

Code article 0047136

SYLVANIA


STARTTM

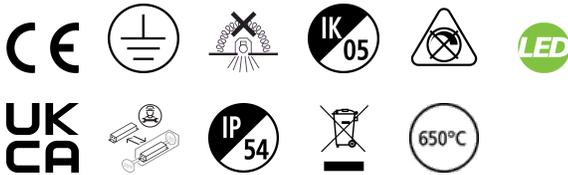


Exterior adjustable surface wall up and down light luminaire, black aluminium - RAL9005, 280lm, 5.8W, 48lm/W, 3000/4000K switchable CCT, adjustable beam angle (0 - 94°), 104.000 hrs L70:B50 lifespan, CRI 80, SDCM<3, IP54, IK05, 1000 hrs salt spray test, -20 - +45°C operating temperature range, 108x108x108mm, Class I

Atouts techniques

Dimensions (mm)

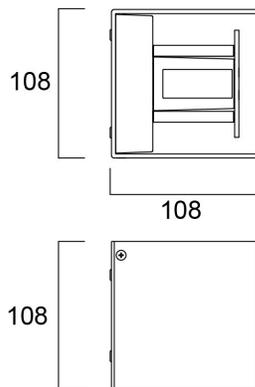

Photométrie



START Surface Wall Cube IP54 2x140lm 2CCT Black

Code article 0047136

SYLVANIA

Données générales

Nom du produit	START Surface Wall Cube IP54 2x140lm 2CCT Black
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Wall surface mounted
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Virtual assistant compatibility	N/A, Amazon Alexa
ETIM Class	EC002892
Numéro virtuel FI	4579605
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	280
Luminaire efficacy (lm/W)	48
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Adjustable
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	5.8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.66
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	46
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	10
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	70
Max. products per 13A C Breaker	86
Max. products per 16A C Breaker	100
Max. products per 20A C Breaker	100
Max. products per 10A B Breaker	56
Max. products per 13A B Breaker	68
Max. products per 16A B Breaker	82
Max. products per 20A B Breaker	96
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	104000
Lifespan L70 B20	101000
Lifespan L70 B10	98700
Lifespan L80 B50	68000
Lifespan L80 B20	67000
Lifespan L80 B10	67000
Lifespan L90 B50	36000
Lifespan L90 B20	35000
Lifespan L90 B10	35000

START Surface Wall Cube IP54 2x140lm 2CCT Black

Code article 0047136

SYLVANIA

Données physiques

Housing colour	Black
IP rating	IP54
IK rating	IK05
Diffuser finish	Transparent
Diffuser material	Glass
Longueur (mm)	108
Largeur (mm)	108
Nominal Product Height (mm)	109
Poids (kg)	0.785

Emballage

Product EAN number	5410288471365
Longueur simple de l'emballage (cm)	14.5
Largeur simple de l'emballage (cm)	14.5
Packaging single depth (cm)	14.5
DUN14 (inner)	15410288471362
Units per outer package	8
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	16.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-45