


# Insaver UGR19 IP54 150 1200lm 840 DALI

Code article 0030535

**SYLVANIA**


**PRO**<sup>TM</sup>

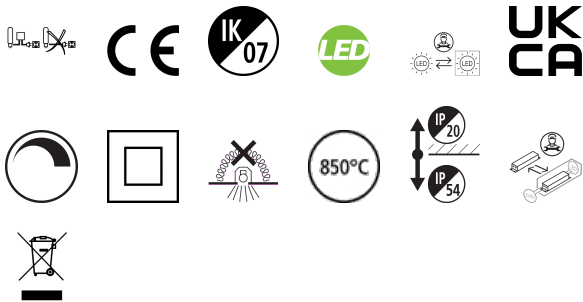



Insaver is a ceiling recessed LED downlight (IP54 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Dimmable DALI driver of TRIDONIC (LCA 17W 250–700mA one4all SR PRE 28000670), 9.5W; 1200lm; 126lm/W; 4000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.

## Atouts techniques

### Dimensions (mm)

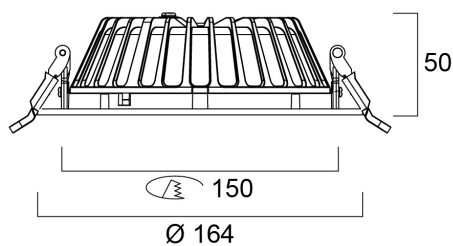

### Photométrie



# Insaver UGR19 IP54 150 1200lm 840 DALI

Code article 0030535

**SYLVANIA**

## Données générales

Nom du produit	Insaver UGR19 IP54 150 1200lm 840 DALI
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	40
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4278512
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1200
Luminaire efficacy (lm/W)	126
Température de couleur (K)	4000
Colour Code	840
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	70
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	9.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2, Switch-dim (mains-rated)
Minimum dimming level (%)	1
Drive current (mA)	290
Courant d'appel (A)	18
Inrush Duration (µs)	140
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	36
Max. products per 13A C Breaker	50
Max. products per 16A C Breaker	60
Max. products per 20A C Breaker	76
Max. products per 10A B Breaker	22
Max. products per 13A B Breaker	30
Max. products per 16A B Breaker	36
Max. products per 20A B Breaker	46
Connectable conductor cross section - Min (mm²)	0.5
Connectable conductor cross section - Max (mm²)	2.5

# Insaver UGR19 IP54 150 1200lm 840 DALI

Code article 0030535

**SYLVANIA**

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	90000
Lifespan L70 B10	90000
Lifespan L80 B50	100000
Lifespan L80 B20	88000
Lifespan L80 B10	80000
Lifespan L90 B50	50000
Lifespan L90 B20	43000
Lifespan L90 B10	39000

## Données physiques

Housing colour	RAL 9010 - Pure white
IP rating	IP54/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	50
Nominal Product Diameter (mm)	165
Built-in diameter (mm)	150
Poids (kg)	0.45
Recessed Depth (mm)	150

## Emballage

Product EAN number	5410288305356
Longueur simple de l'emballage (cm)	17.8
Largeur simple de l'emballage (cm)	17.8
Packaging single depth (cm)	7.0
DUN14 (inner)	15410288305353
Units per outer package	20
Packaging outer length / height (cm)	37.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	37.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40