


# RTS 1.5M 50W 8C WD DD 3W 3H EM

Code article 0042605

**SYLVANIA**


**PRO**<sup>TM</sup>

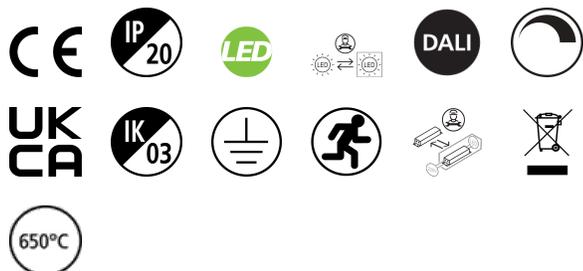

RTS LED linear luminaire for industrial and commercial applications. 1500 mm length with wide optics provide homogeneous light distribution for open areas. Fitted with switching EM driver + 3W convertor + BST NICD 4.8V 3.0Ah (Self-contained Version). Steel housing, White color, 0 ... +40 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 53 W power consumption, 8000 lm luminous flux, 151 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.

## Atouts techniques

### Dimensions (mm)

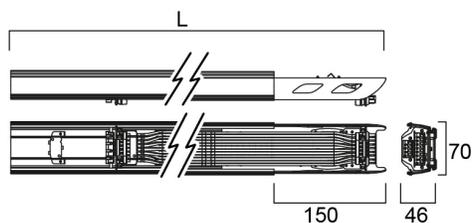

L	600	900	1202	1500	2403	3000	3605	4500
---	-----	-----	------	------	------	------	------	------

### Photométrie

# RTS 1.5M 50W 8C WD DD 3W 3H EM

Code article 0042605

**SYLVANIA**

## Données générales

Nom du produit	RTS 1.5M 50W 8C WD DD 3W 3H EM
Technologie	LED
Cap/Base	N/A
Housing	Steel
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	0°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001957
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	151
Température de couleur (K)	4000
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Photobiological Risk Group	RG1
Flux lumineux (d'urgence) (lm)	550
Emergency duration (h)	3

## Caractéristiques électriques

Consommation électrique totale (W)	53
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	600
Courant d'appel (A)	43.6
Inrush Duration (µs)	188
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 16A C Breaker	23
Max. products per 16A B Breaker	14

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	75000

## Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Longueur (mm)	1500
Largeur (mm)	70.2
Nominal Product Height (mm)	78.6
Poids (kg)	1.7

# RTS 1.5M 50W 8C WD DD 3W 3H EM

Code article 0042605

**SYLVANIA**

## Emballage

Product EAN number	5410288426051
Longueur simple de l'emballage (cm)	150.0
Largeur simple de l'emballage (cm)	7.5
Packaging single depth (cm)	6.5
DUN14 (inner)	15410288426058
Units per outer package	10
Packaging outer length / height (cm)	157.0
Packaging outer width (cm)	44.0
Packaging outer depth (cm)	21.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	0-40