

# Instar Trend 75 SW IP44 BA No-LMP

Code article 0079061

**SYLVANIA**


**PRO**<sup>TM</sup>



INSTAR TREND SW IP44 INDOOR BA is the recessed housing frame to use with GX5.3 LED lamp, not included in the packaging.. Aluminium body, round bezel ring in brushed aluminium finish, IP44 degree of protection, class II, Suitable for internal environment only.

## Atouts techniques


### Dimensions (mm)

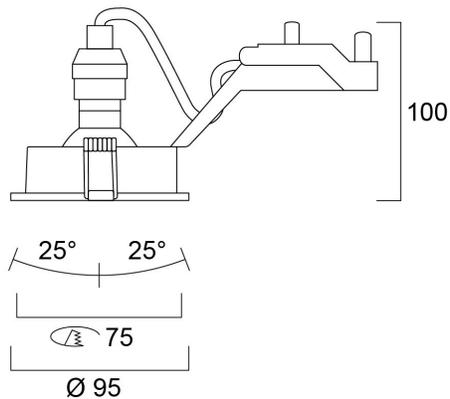

### Photométrie

Distance [m]	Cone diameter [m]	EPD <sup>1</sup> ECU <sup>2</sup> [lm]	EPD <sup>1</sup> ECU <sup>2</sup> [lm]
0.5	0.30	2596	1309
1.0	0.60	1309	326
1.5	0.91	326	145
2.0	1.21	145	62
2.5	1.51	62	31
3.0	1.81	31	16

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 33.8°)



# Instar Trend 75 SW IP44 BA No-LMP

Code article 0079061

**SYLVANIA**

## Données générales

Nom du produit	Instar Trend 75 SW IP44 BA No-LMP
Technologie	Light Source Not Integrated
Cap/Base	GX5.3
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Indoor
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-10°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1
LOR (%)	Dependent on lamp
Couleur de lumière	N/A
Colour Variation Initial (SDCM)	N/A
Chromaticité réglable	N
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

## Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Consommation électrique totale (W)	0.1
Actuel (A)	0.001
Primary Supply/Product voltage - min (V)	12.0
Primary Supply/Product voltage - max (V)	12.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	1
Electrical protection	Class III
Control gear required	Yes
Type d'appareillage	Electronic ballast
Montage de l'appareillage	Remote
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60/HF
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	30
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Données physiques

Housing colour	Aluminium
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	85
Nominal Product Diameter (mm)	83
Built-in diameter (mm)	75
Max. Lamp Diameter (mm) - D	95
Poids (kg)	0.174
Recessed Depth (mm)	90

# Instar Trend 75 SW IP44 BA No-LMP

Code article 0079061

**SYLVANIA**

## Emballage

Product EAN number	5410288790619
Longueur simple de l'emballage (cm)	13.0
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	15410288790616
Units per outer package	30
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	28.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-10-40