


START Panel 600x600 3800Lm 830 LILO

Code article 0042869


SYLVANIA

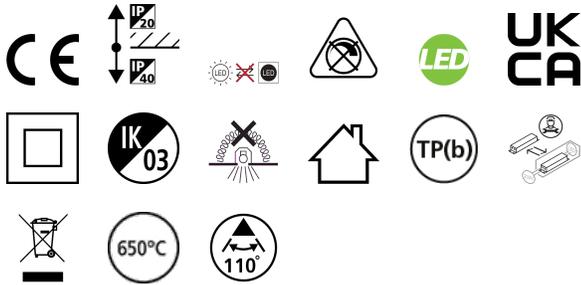

LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<22. RG0, 110 degree beam angle , optical system: PS diffuser with Opal finish. Light color temperature: 3000K Warm White, total system power: 36W , total fixture output: 3800lm, efficacy: 106 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, saftey cables included, 25mm nominal height, White color frame, weight: 1,6Kg.

Atouts techniques


Dimensions (mm)

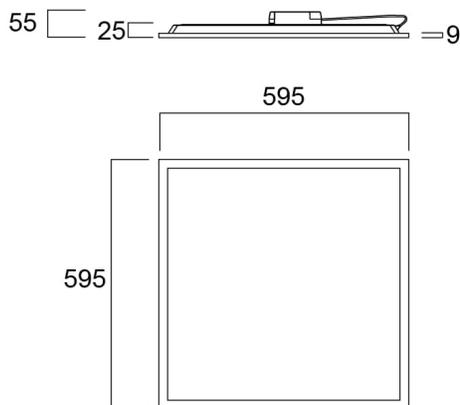

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.51 1.55	80° 85°	5072 491
1.0	3.02 3.16	80° 85°	1268 193
1.5	4.53 4.75	80° 85°	564 85
2.0	6.04 6.33	80° 85°	317 24
2.5	7.55 7.91	80° 85°	203 17
3.0	9.07 9.49	80° 85°	141 12

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 115.4°)
 — C90 - C270 (Half beam angle: 113.0°)



START Panel 600x600 3800Lm 830 LILO

Code article 0042869

SYLVANIA

Données générales

Nom du produit	START Panel 600x600 3800Lm 830 LILO
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4278469
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	106
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	36
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	680
Courant d'appel (A)	17
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	51
Max. products per 13A C Breaker	66
Max. products per 16A C Breaker	81
Max. products per 20A C Breaker	102
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	43
Max. products per 16A B Breaker	54
Max. products per 20A B Breaker	68
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	71000

START Panel 600x600 3800Lm 830 LILO

Code article 0042869

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	Other
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	25
Poids (kg)	1.556

Emballage

Product EAN number	5410288428697
Longueur simple de l'emballage (cm)	60.0
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	64.5
DUN14 (inner)	15410288428694
Units per outer package	1
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	3.8
Packaging outer depth (cm)	64.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45