

# ToLED<sub>o</sub> AVANT T8 CCG 908 1700LM 830 50K RL

Code article 0030289


**SYLVANIA**



Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes High lumen package - 1700lm High lumen efficacy - 150 lm/W Switching cycles - 200,000X Average life 50,000 hours lifespan Lamp length - 908mm Wide beam angle High power factor Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots and maintenance free applications Suitable for operation with electromagnetic gears / CCG and direct mains operation (220-240V) 5-Year warranty

## Atouts techniques

### Dimensions (mm)

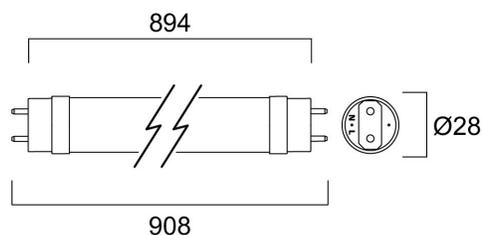

### Photométrie

# ToLED<sub>o</sub> AVANT T8 CCG 908 1700LM 830 50K RL

Code article 0030289

**SYLVANIA**

## Données générales

Nom du produit	ToLED <sub>o</sub> AVANT T8 CCG 908 1700LM 830 50K RL
Technologie	LED
Lamp shape	Tube, single-ended
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4941362
Warranty	5 ans

## Données optiques

Useful luminous flux (Φ <sub>use</sub> )	1700
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0

## Caractéristiques électriques

Power consumption (W)	11.3
Wattage (W)	11.3
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
Control gear required	No
Dimmable	No
Courant d'appel (A)	14.8
Lamp Energy Label (class)	D
Nominal Frequency (Hz)	50/60Hz

## Durée de vie

Lifespan L70 B50	50000
------------------	-------

## Données physiques

IP rating	IP20
Longueur (mm)	908
Nominal Product Diameter (mm)	28
Poids (kg)	0.146

## Emballage

Product EAN number	5410288302898
Longueur simple de l'emballage (cm)	94.6
Largeur simple de l'emballage (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (inner)	15410288302895
Units per outer package	10
Packaging outer length / height (cm)	100.4
Packaging outer width (cm)	22.6
Packaging outer depth (cm)	11.3

## Sécurité

Condition de fonctionnement optimal (° C)	-20-55
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Suitable for totally enclosed fixture