

Raiden IP66 40KLM 865 Asymmetric Wide 2824134



Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 6500K, Non-dimming, 38900lm, 294W, 132lm/W, CRI80, Asymmetric Wide beam angle 110*50°, 100000 hrs L80B50 lifespan, 561x569x76mm (LxWxH) dimensions, 13.4kg weight.

Product Overview


Product name	Raiden IP66 40KLM 865 Asymmetric Wide
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	38900
Luminaire efficacy (lm/W)	132
Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	110*50
Photobiological Risk Group	RG2
Total power consumption (W)	294
Electrical protection	Class I
Dimmable	No
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768241347
Warranty	5 years

Concord


Raiden IP66 40KLM 865 Asymmetric Wide

2824134

Photometry

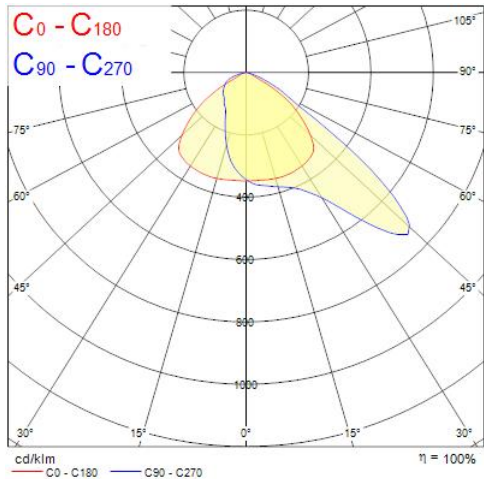

Technical drawings

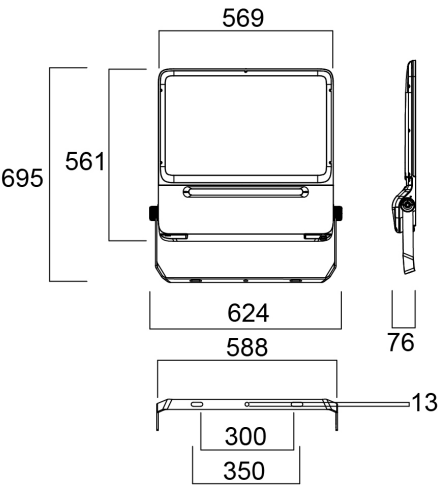

Data table

GENERAL DATA

Product name	Raiden IP66 40KLM 865 Asymmetric Wide
--------------	---------------------------------------

Concord

Raiden IP66 40KLM 865 Asymmetric Wide 2824134

Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C - 50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	38900
Luminaire efficacy (lm/W)	132
Colour temperature (K)	6500
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	110*50
Photobiological Risk Group	RG2

ELECTRICAL DATA

Total power consumption (W)	294
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Transformer required	No
Dimmable	No
Drive current (mA)	6000
Inrush Current (A)	110
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

Raiden IP66 40KLM 865 Asymmetric Wide 2824134

Max. Luminaires per 10A C Breaker	3
Max. Luminaires per 13A C Breaker	3
Max. Luminaires per 16A C Breaker	5
Max. Luminaires per 20A C Breaker	6
Max. Luminaires per 10A B Breaker	1
Max. Luminaires per 13A B Breaker	2
Max. Luminaires per 16A B Breaker	3
Max. Luminaires per 20A B Breaker	3

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	89000

PHYSICAL DATA

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	561
Nominal Product Width (mm)	569
Nominal Product Height (mm)	76
Nominal Product Diameter (mm)	Not applicable
Weight (kg)	13.4

PACKAGING

Single packaging type	Carton
Product EAN number	5025768241347
Packaging single length / height (cm)	63.0
Packaging single width (cm)	63.0
Packaging single depth (cm)	14.0
DUN14 (outer)	05025768241347
Units per outer package	1
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	63.0
Packaging outer depth (cm)	14.0

Concord

Raiden IP66 40KLM 865 Asymmetric Wide
2824134

SAFETY DATA

Optimal operating condition (°C)	-40-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No