


START WATERPROOF 1500 HOUSING 2X

Code article 0047196

SYLVANIA


STARTTM

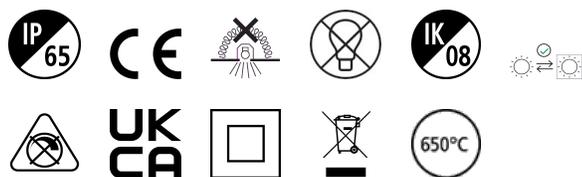

- Luminaire, polycarbonate housing
- Twin version, 1500mm
- Protection type IP65
- Luminous flux and light colour vary depending on LED tubes used
- To be used with T8 LED tubes
- Easy to install with stainless steel fixing brackets included for ceiling mounting
- Ideal for any industrial facilities, garages, car parks, workshops.

Atouts techniques

Dimensions (mm)



Photométrie

START WATERPROOF 1500 HOUSING 2X

Code article 0047196

SYLVANIA

Données générales

Nom du produit	START WATERPROOF 1500 HOUSING 2X
Technologie	LED
Cap/Base	2G13
Housing	PC Polycarbonate
Montage	Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4357158
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1
Luminaire efficacy (lm/W)	1
Couleur de lumière	N/A
Colour Variation Initial (SDCM)	N/A
Distribution type	Symmetric
Photobiological Risk Group	Not applicable

Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Consommation électrique totale (W)	0.1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Type d'appareillage	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	1
Max. products per 16A C Breaker	1
Max. products per 16A B Breaker	1
Connectable conductor cross section - Max (mm ²)	1.5

Durée de vie

Lifespan L70 B50	25000
------------------	-------

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1580
Largeur (mm)	100
Nominal Product Height (mm)	60
Poids (kg)	1.0

START WATERPROOF 1500 HOUSING 2X

Code article 0047196

SYLVANIA

Emballage

Product EAN number	5410288471969
Longueur simple de l'emballage (cm)	161.5
Largeur simple de l'emballage (cm)	9.7
Packaging single depth (cm)	4.4
DUN14 (inner)	15410288471966
Units per outer package	8
Packaging outer length / height (cm)	163.0
Packaging outer width (cm)	20.3
Packaging outer depth (cm)	21.8

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40