


GRADEO S 1200 830/835/840 DALI

Code article 0042741

SYLVANIA

PROTM

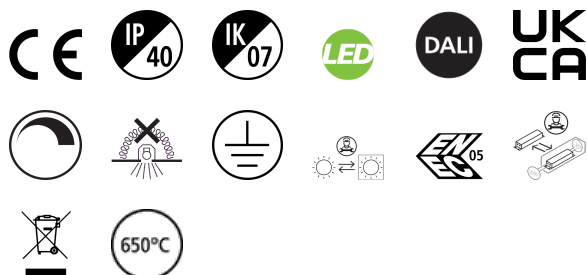

GRADEO S 1200 830/835/840 DALI is a modular high efficacy low glare surface and suspended LED Linear luminaire developed for education and seminar room environments. Optical solution: Micro Prismatic diffuser combined with lenses to provide homogeneous and high efficient light. Minimalist, robust body design, luminaire dimensions: 1280x205x53mm, white powder coated steel body (RAL9016) and plastic end caps. IP40, IK06 rating. DALI-2 driver with integrated CCT switch options (3000/3500/4000K). CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency. 27W system power, 3600-3900lm luminous flux, up to 144lm/W system efficacy with 4000K CCT option in case of direct distribution, UGR<19 glare level. 3800-4000lm luminous flux, up to 148lm/W system efficacy with 4000K CCT option in case of direct/indirect light distribution with Gradeo indirect modules, 80/20% D/I ratio. Luminance at 65° < 3000 cd/m², lifespan: 100,000 hours L80B50, photobiological safety risk group 1. Electrical protection Class I.

GRADEO S 1200 830/835/840 DALI

Code article 0042741

SYLVANIA


Atouts techniques

Photométrie

0.5	0.92 0.90	E(1°) E(C90) E(C0)	42.8° 41.9° 41.9°	6406 1258 1251
1.0	1.84 1.79	E(1°) E(C90) E(C0)	42.8° 41.9° 41.9°	1809 352 351
1.5	2.76 2.69	E(1°) E(C90) E(C0)	42.8° 41.9° 41.9°	718 140 140
2.0	3.68 3.59	E(1°) E(C90) E(C0)	42.8° 41.9° 41.9°	432 81 81
2.5	4.60 4.45	E(1°) E(C90) E(C0)	42.8° 41.9° 41.9°	297 52 51
3.0	5.52 5.38	E(1°) E(C90) E(C0)	42.8° 41.9° 41.9°	179 38 37

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (half beam angle: 93.8°)
— C90 - C270 (half beam angle: 93.2°)



Données générales

Nom du produit	GRADEO S 1200 830/835/840 DALI
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling surface mounting, Suspended
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	5°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279683
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	144
Couleur de lumière	Warm White or Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

GRADEO S 1200 830/835/840 DALI

Code article 0042741

SYLVANIA

Caractéristiques électriques

Consommation électrique totale (W)	27
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	7
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Courant d'appel (A)	24
Inrush Duration (μ s)	190
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	46
Max. products per 16A C Breaker	63
Max. products per 16A B Breaker	43
Connectable conductor cross section - Max (mm ²)	2.5

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	51000

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Longueur (mm)	1280
Largeur (mm)	205
Nominal Product Height (mm)	53
Poids (kg)	4.911

Emballage

Product EAN number	5410288427416
Longueur simple de l'emballage (cm)	131.0
Largeur simple de l'emballage (cm)	8.5
Packaging single depth (cm)	23.5
DUN14 (inner)	05410288427416
Units per outer package	1
Packaging outer length / height (cm)	131.0
Packaging outer width (cm)	8.5
Packaging outer depth (cm)	23.5

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (°C)	5-45