


Pixo Large Food Fruit NB MB WB White

Code article 0004602

SYLVANIA


PROTM

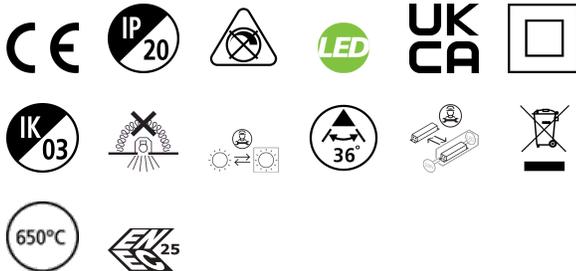

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for Fruit applications, the Fruit and vegetable counter enhances the quality and genuineness of fresh products, bright tones highlight the colours of Fruits Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 3000K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 3650lm, efficacy: 91lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm, length of the Adaptor : 158mm. 5 years warranty Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.

Atouts techniques

Dimensions (mm)

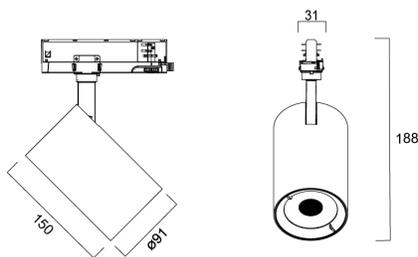

Photométrie

Pixo Large Food Fruit NB MB WB White

Code article 0004602

SYLVANIA

Données générales

| | |
|----------------------------------|---|
| Nom du produit | Pixo Large Food Fruit NB MB WB White |
| Technologie | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Montage | Track mounting |
| Built in presence detector | NONE |
| General application | Museums & Galleries, Office, Residential & Consumer, Retail |
| Operating temperature range (°C) | 1°C...+25°C |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC001744 |
| Numéro virtuel FI | 4289271 |
| Warranty | 5 ans |

Données optiques

| | |
|---------------------------------|-----------|
| Fixture luminous flux (lm) | 3650 |
| Luminaire efficacy (lm/W) | 91 |
| Température de couleur (K) | 3000 |
| Couleur de lumière | N/A |
| IRC (Ra) | 90 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 36 |
| Distribution type | Symmetric |
| Photobiological Risk Group | RG1 |

Caractéristiques électriques

| | |
|--|-----------------------------|
| Consommation électrique totale (W) | 40 |
| Actuel (A) | 0.17 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Lamp power factor | 0.9 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 15 |
| Electrical protection | Class II |
| Type d'appareillage | LED driver constant current |
| Dimmable | No |
| Dimming method | N/A |
| Courant d'appel (A) | 48 |
| Inrush Duration (µs) | 4 |
| Energy Efficiency Class (A->G) of contained light source | E |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 24 |
| Max. products per 13A C Breaker | 26 |
| Max. products per 16A C Breaker | 32 |
| Max. products per 20A C Breaker | 40 |
| Max. products per 10A B Breaker | 15 |
| Max. products per 13A B Breaker | 16 |
| Max. products per 16A B Breaker | 20 |
| Max. products per 20A B Breaker | 25 |

Durée de vie

| | |
|------------------|--------|
| Lifespan L70 B50 | 100000 |
| Lifespan L80 B50 | 85000 |
| Lifespan L90 B50 | 41000 |

Pixo Large Food Fruit NB MB WB White

Code article 0004602

SYLVANIA

Données physiques

| | |
|-------------------------------|------------|
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |
| Diffuser finish | Other |
| Diffuser material | None |
| Finition réflecteur | High-gloss |
| Longueur (mm) | 150 |
| Nominal Product Diameter (mm) | 91 |
| Poids (kg) | 0.74 |

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288046020 |
| Longueur simple de l'emballage (cm) | 21.5 |
| Largeur simple de l'emballage (cm) | 12.7 |
| Packaging single depth (cm) | 22.3 |
| DUN14 (inner) | 15410288046027 |
| Units per outer package | 8 |
| Packaging outer length / height (cm) | 53.0 |
| Packaging outer width (cm) | 44.5 |
| Packaging outer depth (cm) | 25.0 |

Sécurité

| | |
|---|------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | 1-25 |