

# INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB

Code article 0049040

**SYLVANIA**


**PRO**<sup>TM</sup>



Round shaped in-ground luminaire with +/-30° adjustable light module, drive-over for pressure loads to 2000kg (20kN), comes with 2m 3x1mm<sup>2</sup> flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 390lm, 5.7W, 68lm/W, CRI80, 30° beam angle, 50000 hrs L70 B50 lumen maintenance, 120mm diameter, 136mm recessing tube height, 0.81kg weight.

## Atouts techniques

### Dimensions (mm)

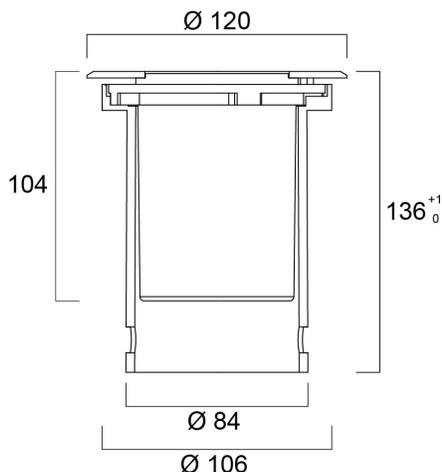


### Photométrie

Distance [m]	Cone diameter [m]	E10°	E15°	E30°	E45°	E60°	E75°	E90°	E105°	E120°	ILLUMINANCE [lx]
0.5	0.26 0.26	1071	680	340	212	138	92	60	40	27	450
1.0	0.52 0.51	535	340	170	106	70	46	30	20	14	225
1.5	0.78 0.77	357	226	113	73	48	31	20	13	9	150
2.0	1.03 1.03	268	170	85	54	35	22	14	9	6	112
2.5	1.29 1.28	215	136	68	43	28	17	11	7	5	89
3.0	1.55 1.54	171	109	54	34	22	14	9	6	4	70

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 29.9°)  
— C90 - C270 (Half beam angle: 29.0°)

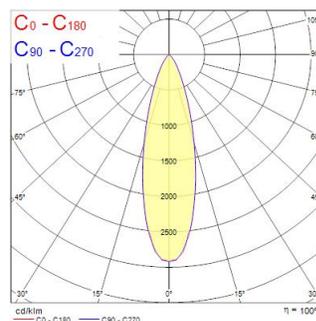

# INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB

Code article 0049040

**SYLVANIA**

## Données générales

Nom du produit	INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ground recessed
General application	Hospitality, Museums & Galleries, Office, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000758
Numéro virtuel FI	4579503
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	390
Luminaire efficacy (lm/W)	68
Température de couleur (K)	3000
Colour Code	830
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	30
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	5.7
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Dimmable	No
Drive current (mA)	500
Courant d'appel (A)	15
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	50
Max. products per 13A C Breaker	65
Max. products per 16A C Breaker	80
Max. products per 20A C Breaker	100
Max. products per 10A B Breaker	30
Max. products per 13A B Breaker	39
Max. products per 16A B Breaker	48
Max. products per 20A B Breaker	60

## Durée de vie

Lifespan L70 B50	50000
------------------	-------

## Données physiques

Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Diffuser material	Glass
Nominal Product Height (mm)	136
Nominal Product Diameter (mm)	120
Poids (kg)	0.81

# INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB

Code article 0049040

**SYLVANIA**

## Emballage

Product EAN number	5410288490403
Longueur simple de l'emballage (cm)	12.5
Largeur simple de l'emballage (cm)	12.5
Packaging single depth (cm)	15.0
DUN14 (inner)	15410288490400
Units per outer package	8
Packaging outer length / height (cm)	27.0
Packaging outer width (cm)	27.0
Packaging outer depth (cm)	31.5

## Sécurité

Condition de fonctionnement optimal (° C)	-20-45
---	--------