


# Pixo Line Driver DALI 600 White

Artikelnummer 0007867

**SYLVANIA**


**PRO**<sup>TM</sup>

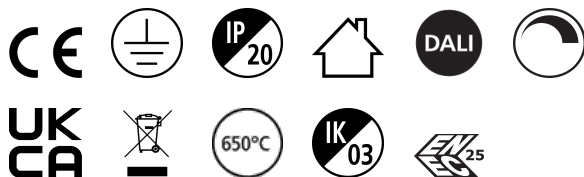

Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Constant current 350mA -1050mA digital dimmable DALI in-track driver with GR6d-15 connector for LED light modules, polycarbonate body Clip holder and fixing screw included in the driver box, white finishing colour, max. system power: 56W, operating voltage: 220-240V / 50-60Hz Driver module should be combined with suitable LED module. Switch-dim selection with 8 power settings meet all installation needs with one single product selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.672mmx32mmx31mm

## Technische Werte

### Größe (mm)



### Photometrie

# Pixo Line Driver DALI 600 White

Artikelnummer 0007867

**SYLVANIA**

## Allgemeine Daten

|                               |                                                  |
|-------------------------------|--------------------------------------------------|
| Produktname                   | Pixo Line Driver DALI 600 White                  |
| Technologie                   | Driver                                           |
| Montage                       | Ceiling surface mounting                         |
| Allgemeine Anwendungsbereiche | Retail, Hospitality, Museums & Galleries, Office |
| Umgebungstemperaturbereich    | -20°C...+40°C                                    |
| ETIM Klasse                   | EC002710                                         |
| E-Nummer FI                   | 4279419                                          |
| Garantie                      | 5 Jahre                                          |

## Optische Daten

|                            |                |
|----------------------------|----------------|
| Lichtfarbe                 | N/A            |
| Photobiological Risk Group | Not applicable |

## Elektrische Daten

|                                                   |                        |
|---------------------------------------------------|------------------------|
| Leistungsaufnahme gesamt (W)                      | 56                     |
| Primary Supply/Product voltage - min (V)          | 220.0                  |
| Primary Supply/Product voltage - max (V)          | 240.0                  |
| Leistungsfaktor der Lampe                         | 0.95                   |
| THD (bei 230V, 50Hz, bei 100% Dimm-Level)         | 10                     |
| Elektrische Schutzklasse                          | Class I                |
| Anzahl der Schaltzyklen vor vorzeitigem Ausfall   | >100000                |
| Dimmbar                                           | Yes                    |
| Dimming method                                    | DALI                   |
| Min. drive current (mA)                           | 350                    |
| Max. drive current (mA)                           | 1050                   |
| Drive current - Range (mA)                        | 350mA / 1050mA         |
| Einschaltstrom (A)                                | 42                     |
| Dauer Einschaltstrom (µs)                         | 168                    |
| Nennfrequenz (Hz)                                 | 50/60Hz                |
| LED Flickering Rate                               | Ultra low (5% or less) |
| Max. Anzahl Leuchten pro 10A C Sicherung          | 15                     |
| Max. Anzahl Leuchten pro 16A C Sicherung          | 24                     |
| Max. Anzahl Leuchten pro 10A B Sicherung          | 9                      |
| Max. Anzahl Leuchten pro 16A B Sicherung          | 14                     |
| Überspannungsschutz (Differenzmodus --> L-N) (kV) | 1                      |

## Physikalische Daten

|                           |       |
|---------------------------|-------|
| Gehäusefarbe              | White |
| IP Schutzart              | IP20  |
| IK Schutzart              | IK03  |
| Länge (mm)                | 672   |
| Breite (mm)               | 31    |
| Nominale Produkthöhe (mm) | 31.5  |
| Gewicht (kg)              | 0.36  |

# Pixo Line Driver DALI 600 White

Artikelnummer 0007867

**SYLVANIA**

## Packaging

|                                        |                |
|----------------------------------------|----------------|
| EAN Code                               | 5410288078670  |
| Einzelverpackung Länge (cm)            | 68.0           |
| Einzelverpackung Breite (cm)           | 5.0            |
| Einzelverpackung Tiefe (cm)            | 3.7            |
| DUN 14 (außen)                         | 15410288078677 |
| Anzahl an Einheiten je Außenverpackung | 20             |
| Außenverpackung Länge (cm)             | 70.0           |
| Außenverpackung Breite (cm)            | 27.0           |
| Außenverpackung Tiefe (cm)             | 17.0           |

## Safety data

|                                  |        |
|----------------------------------|--------|
| Glühdrahttest (°C)               | 650    |
| Optimale Betriebstemperatur (°C) | -20-40 |