

# Pixo Line 1500 UGR19 830 Black

Artikelnummer 0007827

**SYLVANIA**


**PRO**<sup>TM</sup>



Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Aluminium body, plastic end caps,aluminised plastic low glare optics in a single line configuration, light beam angle:70° Textured black finishing colour. Light color temperature: 3000K, warm white, max. system power: 50W Max. fixture lumen output: 7300lm, efficacy: 146lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation Multipower driver module with 8 power settings meet all installation needs with one single product, selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class III. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.1464mmx37.4mmx37mm

## Technische Werte

### Größe (mm)

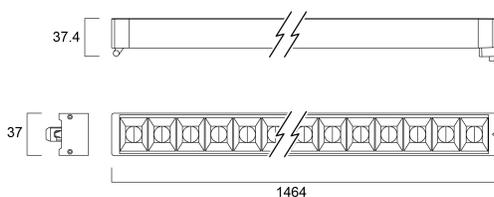

### Photometrie

0.5	0.66 0.69	E(0°) E(C0) 33.8° E(C0) 34.9°	1581 965 982
1.0	1.33 1.37	E(0°) E(C0) 33.8° E(C0) 34.9°	3296 985 982
1.5	1.99 2.06	E(0°) E(C0) 33.8° E(C0) 34.9°	1909 499 424
2.0	2.66 2.75	E(0°) E(C0) 33.8° E(C0) 34.9°	849 247 239
2.5	3.32 3.44	E(0°) E(C0) 33.8° E(C0) 34.9°	543 159 151
3.0	3.99 4.12	E(0°) E(C0) 33.8° E(C0) 34.9°	377 110 106

Distance [m]    Cone diameter [m]    Illuminance [lx]


— C0 - C180 (Half beam angle: 69.0°)

— C90 - C270 (Half beam angle: 67.2°)

# Pixo Line 1500 UGR19 830 Black

Artikelnummer 0007827

**SYLVANIA**

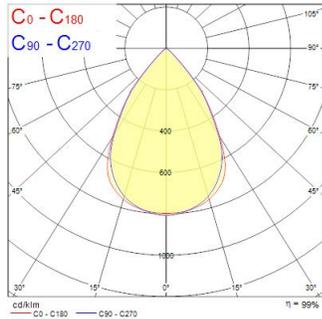

## Allgemeine Daten

Produktname	Pixo Line 1500 UGR19 830 Black
Technologie	LED
Sockel	N/A
Montage	Track mounting
Allgemeine Anwendungsbereiche	Retail, Hospitality, Museums & Galleries, Office
Umgebungstemperaturbereich	-20°C...+40°C
ETIM Klasse	EC000996
E-Nummer FI	4279413
Garantie	5 Jahre

## Optische Daten

Leuchtenlichtstrom (lm)	7300
Systemeffizienz (lm/W)	146
Farbtemperatur (K)	3000
Lichtfarbe	Warm White
Farbwiedergabeindex (Ra)	80
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	70
Blendungsbegrenzung	< 19
Photobiological Risk Group	Not applicable

## Elektrische Daten

Leistungsaufnahme gesamt (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Elektrische Schutzklasse	Class III
Dimmbar	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	C
Nennfrequenz (Hz)	N/A

## Lifetime data

Lebensdauer - L70B50	90000
Lebensdauer - L70B20	90000
Lebensdauer - L70B10	90000
Lebensdauer - L80B50	90000
Lebensdauer - L80B20	79000
Lebensdauer - L80B10	76000
Lebensdauer - L90B50	43000
Lebensdauer - L90B20	37000
Lebensdauer - L90B10	36000

# Pixo Line 1500 UGR19 830 Black

Artikelnummer 0007827

**SYLVANIA**

## Physikalische Daten

Gehäusefarbe	Black
IP Schutzart	IP20
IK Schutzart	IK03
Länge (mm)	1464
Breite (mm)	37
Nominale Produkthöhe (mm)	37.4
Gewicht (kg)	0.9

## Packaging

EAN Code	5410288078274
Einzelverpackung Länge (cm)	147.0
Einzelverpackung Breite (cm)	4.3
Einzelverpackung Tiefe (cm)	4.3
DUN 14 (außen)	15410288078271
Anzahl an Einheiten je Außenverpackung	10
Außenverpackung Länge (cm)	149.0
Außenverpackung Breite (cm)	24.0
Außenverpackung Tiefe (cm)	11.0

## Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	-20-40