

# LIFESAFE PRO TRK OA STUCCHI EM3NM DABLK

Code article 0038851

**SYLVANIA**


LiFeSafe



LiFeSafe PRO TRK OA STUCCHI EM3 NM DA BLK is a black DALI addressable LED emergency track mounted luminaire with stucchi track adaptor. Suitable for One Track system. Non-Maintained, 3Hr emergency duration, 140lm emergency output, IK02, IP20, Class II construction. 6-year warranty.

## Atouts techniques

### Dimensions (mm)

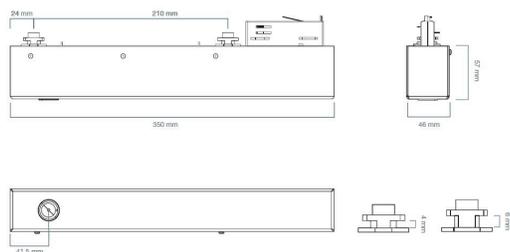

### Photométrie

### Données générales

Nom du produit	LIFESAFE PRO TRK OA STUCCHI EM3NM DABLK
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Track mounting
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	0°C...+35°C
ETIM Class	EC001957
Warranty	6 years

### Données optiques

Fixture luminous flux (lm)	140
Luminaire efficacy (lm/W)	107
Température de couleur (K)	5700
IRC (Ra)	70
Photobiological Risk Group	RG2
Maintien du flux à la fin de la durée de vie nominale (lm)	80
Luminous flux (emergency) (lm)	140
Flux lumineux (d'urgence) (lm)	140
Emergency duration (h)	3

# LIFESAFE PRO TRK OA STUCCHI EM3NM DABLK

Code article 0038851

**SYLVANIA**

## Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Actuel (A)	0.016
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.58
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	63.0
Electrical protection	Class I
Control gear required	Yes
Type d'appareillage	LED driver constant current
Drive current (mA)	450
Courant d'appel (A)	18.4
Inrush Duration ( $\mu$ s)	3
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	200
Max. products per 13A C Breaker	280
Max. products per 16A C Breaker	280
Max. products per 20A C Breaker	280
Max. products per 10A B Breaker	200
Max. products per 13A B Breaker	150
Max. products per 16A B Breaker	150
Max. products per 20A B Breaker	150
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Durée de vie

Lifespan L70 B10	120000
Lifespan L90 B10	100000

## Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK02
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Longueur (mm)	350
Largeur (mm)	57
Nominal Product Height (mm)	46
Poids (kg)	0.77

## Emballage

Product EAN number	5410288388519
Longueur simple de l'emballage (cm)	45.0
Largeur simple de l'emballage (cm)	22.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05410288388519
Units per outer package	1
Packaging outer length / height (cm)	45.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	11.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (°C)	0 °C-35
Utilisation pour applications sèches uniquement	Yes

# LIFESAFE PRO TRK OA STUCCHI EM3NM DABLK

---

Code article 0038851

**SYLVANIA**