


Rocks IP65 9KLM 840 AISLE SSA03H

Code article 2825429


Concord

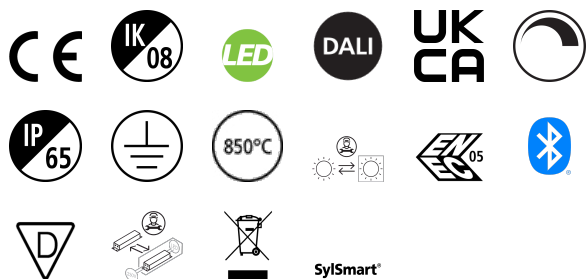

Logistics and Industry high bay luminaire with Aisle optics to provide necessary illumination for narrow areas, comes complete with 2000mm flying lead and 1000mm suspension cable, aluminium housing, PC diffuser, IP65, IK08, Class I, 4000K, CRI80, 3 step MacAdam ellipse, Sylsmart Connected (SSA) - Sensor version, 9100lm, 50W, 182lm/W, 105.000hrs L80B50 lifespan, 446 x 481 x 102mm (LxWxD) dimensions, 4.29kg weight, RAL7012 Basalt Grey color, -20...+40°C operating temperature range. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3.


Atouts techniques

Dimensions (mm)

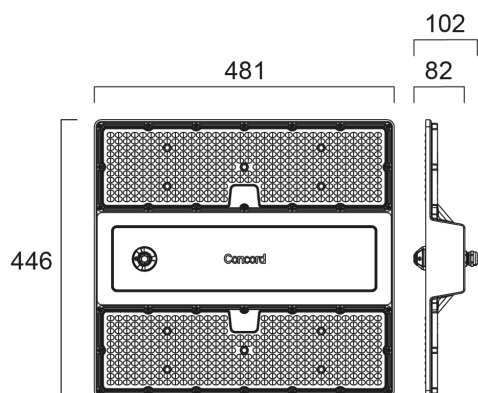

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [m]	Beam diameter [m]
0.5	0.25	0.53	0.25	0.25	0.25
1.0	0.55	1.06	0.55	0.55	0.55
1.5	0.83	1.60	0.83	0.83	0.83
2.0	1.10	2.13	1.10	1.10	1.10
2.5	1.38	2.66	1.38	1.38	1.38
3.0	1.65	3.19	1.65	1.65	1.65
Distance [m] Cone diameter [m]					
C0 - C180 (Half beam angle: 56.9°)					
C90 - C270 (Half beam angle: 30.9°)					
Illuminance [lx]					
0.5	5400	15.4°	2440	25.0°	1870
1.0	1360	15.4°	610	25.0°	468
1.5	600	15.4°	274	25.0°	204
2.0	320	15.4°	152	25.0°	112
2.5	210	15.4°	97	25.0°	70
3.0	150	15.4°	67	25.0°	51



Rocks IP65 9KLM 840 AISLE SSA03H

Code article 2825429

Concord

Données générales

Nom du produit	Rocks IP65 9KLM 840 AISLE SSA03H
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Suspended
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001716
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	9100
Luminaire efficacy (lm/W)	182
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	50
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	8
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	720
Courant d'appel (A)	3.3
Inrush Duration (µs)	3000
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	34
Max. products per 13A C Breaker	45
Max. products per 16A C Breaker	55
Max. products per 20A C Breaker	69
Max. products per 10A B Breaker	20
Max. products per 13A B Breaker	27
Max. products per 16A B Breaker	55
Max. products per 20A B Breaker	41

Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B50	105000
Lifespan L80 B20	91000

Rocks IP65 9KLM 840 AISLE SSA03H

Code article 2825429

Concord

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser material	PC Polycarbonate
Finition réflecteur	Matt
Longueur (mm)	481
Largeur (mm)	446
Nominal Product Height (mm)	102
Poids (kg)	4.29

Emballage

Product EAN number	5025768254293
Longueur simple de l'emballage (cm)	53.5
Largeur simple de l'emballage (cm)	49.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768254293
Units per outer package	1
Packaging outer length / height (cm)	53.5
Packaging outer width (cm)	49.5
Packaging outer depth (cm)	20.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40