


START Track Spot S DALI 1950lm 930 MB BLK

Code article 0004941


SYLVANIA

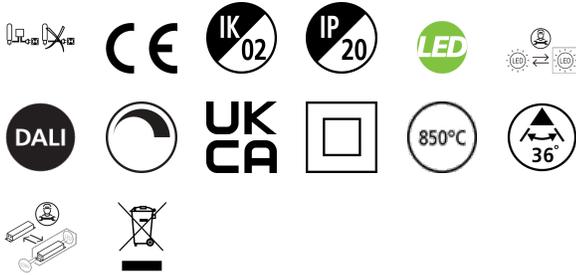

Spotlight for track mounting, decorative heat sink, black (RAL 9005) housing, equipped with Global GAC69 Pulse Adaptor, 1944 Lm, 25 W, 78 Lm/W, 3000 K, drive current: 600 mA, CRI 90, 36° beam angle, DALI dimmable, IP20, IK02, 50000 hrs, (H x W) 200 x 140 mm.

Atouts techniques


Dimensions (mm)

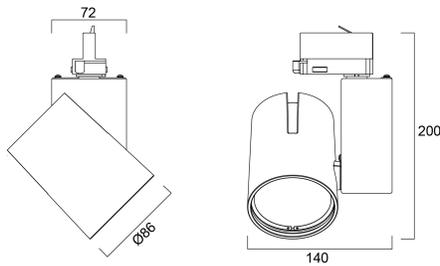

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.32	0.10	1573 660
1.0	0.65	0.20	393 165
1.5	0.97	0.30	166 73
2.0	1.30	0.40	95 41
2.5	1.62	0.50	61 28
3.0	1.95	0.60	42 19

Distance [m] Cone diameter [m] Beam diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 36.0°)



START Track Spot S DALI 1950lm 930 MB BLK

Code article 0004941

SYLVANIA

Données générales

Nom du produit	START Track Spot S DALI 1950lm 930 MB BLK
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Fixture rating	Enclosed
General application	Retail
Operating temperature range (°C)	1°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel SE	7426226
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1944
Luminaire efficacy (lm/W)	78
LOR (%)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	25
Actuel (A)	0.1
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.96
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	Electronic ballast
Montage de l'appareillage	Integral
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	600
Courant d'appel (A)	26
Inrush Duration (µs)	151
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	31
Max. products per 13A C Breaker	43
Max. products per 16A C Breaker	53
Max. products per 20A C Breaker	66
Max. products per 10A B Breaker	19
Max. products per 13A B Breaker	26
Max. products per 16A B Breaker	32
Max. products per 20A B Breaker	40

START Track Spot S DALI 1950lm 930 MB BLK

Code article 0004941

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	79500
Lifespan L90 B50	69500
Lifespan L90 B20	54500
Lifespan L90 B10	47500

Données physiques

Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Largeur (mm)	140
Nominal Product Height (mm)	200
Poids (kg)	0.966

Emballage

Product EAN number	5410288049410
Longueur simple de l'emballage (cm)	17.5
Largeur simple de l'emballage (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (inner)	05410288049410
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	1-25
Utilisation pour applications sèches uniquement	Yes