


# Pixo Large Food Bread NB MB WB White

Code article 0004596

**SYLVANIA**


**PRO**

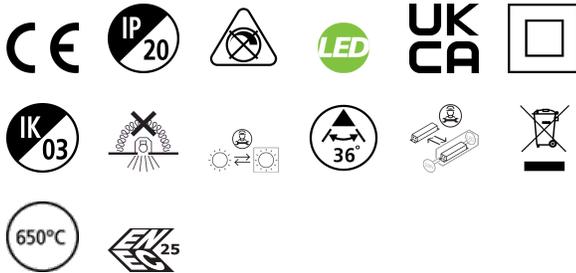

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Special LED light source for BREAD applications ideal for enhancing the nuances of golden bread, gold shade gives a more "greedy" appearance at the counter Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 2400K, Special spectrum for FOOD applications System power: 40W, Fixture lumen output: 3400lm, efficacy: 85lm/W, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm, lenght of the Adaptor : 158mm. 5 years warranty Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.

## Atouts techniques

### Dimensions (mm)

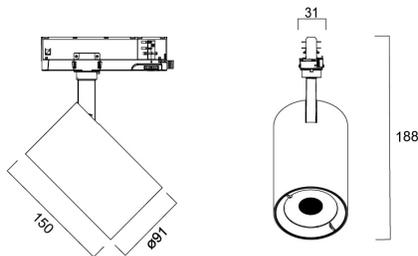

### Photométrie

# Pixo Large Food Bread NB MB WB White

Code article 0004596

**SYLVANIA**

## Données générales

Nom du produit	Pixo Large Food Bread NB MB WB White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Built in presence detector	NONE
General application	Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4289265
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	85
Température de couleur (K)	2400
Couleur de lumière	N/A
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	40
Actuel (A)	0.17
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	48
Inrush Duration (µs)	4
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	32
Max. products per 20A C Breaker	40
Max. products per 10A B Breaker	15
Max. products per 13A B Breaker	16
Max. products per 16A B Breaker	20
Max. products per 20A B Breaker	25

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B50	85000
Lifespan L90 B50	41000

# Pixo Large Food Bread NB MB WB White

Code article 0004596

**SYLVANIA**

## Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	High-gloss
Longueur (mm)	150
Nominal Product Diameter (mm)	91
Poids (kg)	0.74

## Emballage

Product EAN number	5410288045962
Longueur simple de l'emballage (cm)	21.5
Largeur simple de l'emballage (cm)	12.7
Packaging single depth (cm)	22.3
DUN14 (inner)	15410288045969
Units per outer package	8
Packaging outer length / height (cm)	53.0
Packaging outer width (cm)	44.5
Packaging outer depth (cm)	25.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-25