


START eco Emergency Spot Manual Test Non Maintained 3h Corridor

Code article 0032003


SYLVANIA

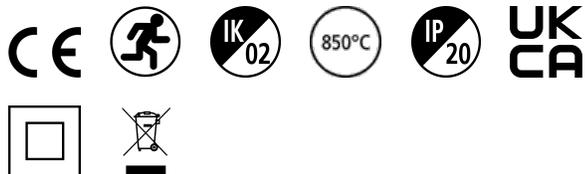

Recessed Spot Light used for Emergency application Narrow beam for corridor application

Atouts techniques


Dimensions (mm)

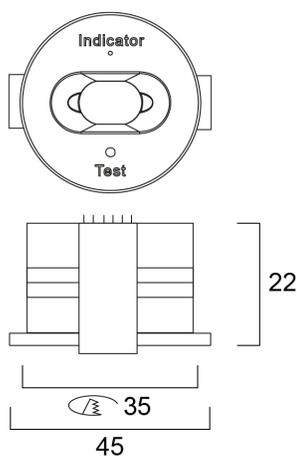

Photométrie

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.80 2.23	517 36 18
1.0	1.61 4.45	127 9 4
1.5	2.41 6.68	54 4 2
2.0	3.22 8.90	25 2 1
2.5	4.02 11.13	16 1 0.5
3.0	4.82 13.35	11 0.7 0.4

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 131.6°)
 — C90 - C270 (Half beam angle: 77.6°)

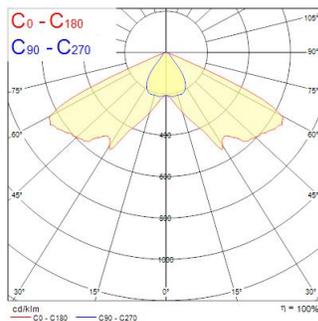

START eco Emergency Spot Manual Test Non Maintained 3h Corridor

Code article 0032003

SYLVANIA

Données générales

Nom du produit	START eco Emergency Spot Manual Test Non Maintained 3h Corridor
Technologie	LED
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	0°C...+35°C
ETIM Class	EC001957
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	170
Température de couleur (K)	5000
Colour Code	765
IRC (Ra)	70
Beam Angle (°)	140 x 90
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	170
Emergency duration (h)	3

Caractéristiques électriques

Actuel (A)	0.013
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	230
Lamp power factor	0.4
Electrical protection	Class II
Drive current (mA)	530
Courant d'appel (A)	10
Inrush Duration (µs)	200
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	80
Max. products per 13A C Breaker	115
Max. products per 16A C Breaker	125
Max. products per 20A C Breaker	160

Durée de vie

Lifespan L70 B50	30000
Lifespan L80 B50	21000
Lifespan L80 B20	19000
Lifespan L80 B10	17000
Lifespan L90 B50	15000
Lifespan L90 B20	12000
Lifespan L90 B10	9000

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	150
Largeur (mm)	45
Nominal Product Height (mm)	45
Poids (kg)	0.27

START eco Emergency Spot Manual Test Non Maintained 3h Corridor

Code article 0032003

SYLVANIA

Emballage

Product EAN number	5410288320038
Longueur simple de l'emballage (cm)	20.0
Largeur simple de l'emballage (cm)	9.0
Packaging single depth (cm)	4.5
DUN14 (inner)	15410288320035
Units per outer package	20
Packaging outer length / height (cm)	38.5
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	25.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	0-35