

# ToLEDo Vintage Candle DIM 250LM E14 SL

Code article 0030150


**SYLVANIA**



Experience enchanting Flexible Filament LED lamps, blending timeless charm with cutting-edge technology -say goodbye to ordinary LED filament lamps! Sylvania ToLEDo™ Vintage lamps boast superior design, higher lumen output, making them perfect for general illumination, creating cosy ambience and decorative lighting. Illuminate your living rooms, dining areas, and kitchens at home with elegance or create a captivating ambience in hotels, restaurants, bars, and heritage spaces Lumen output -250lm 15,000 hours average rated life -last 7.5 times longer than incandescent vintage lamps Replace up to 25W incandescent lamps with ease, while enjoying dimmable lighting with approved dimmers. Environment friendly – no mercury and lower CO2 emissions Backed by a 3-year warranty for complete peace of mind.

## Atouts techniques

### Dimensions (mm)

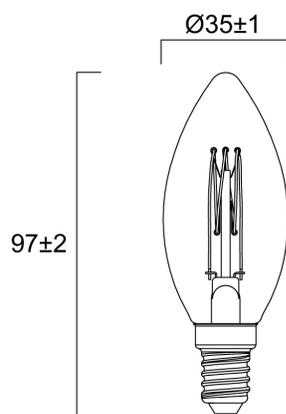

### Photométrie

# ToLEDo Vintage Candle DIM 250LM E14 SL

Code article 0030150

**SYLVANIA**

## Données générales

Nom du produit	ToLEDo Vintage Candle DIM 250LM E14 SL
Technologie	LED
Lamp shape	Candle
Cap/Base	E14
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Warranty	3 ans

## Données optiques

Useful luminous flux (Φuse)	250
Température de couleur (K)	2000
Couleur de lumière	Candlelight
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	330
Photobiological Risk Group	RG1

## Caractéristiques électriques

Power consumption (W)	3.5
Wattage (W)	3.5
Equivalent watt (W)	25
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	Yes
Courant d'appel (A)	0.26
Inrush Duration (µs)	330
Lamp Energy Label (class)	G
Nominal Frequency (Hz)	50/60Hz

## Durée de vie

Lifespan L70 B50	15000
------------------	-------

## Données physiques

IP rating	IP20
Nominal Product Height (mm)	92
Nominal Product Diameter (mm)	35
Poids (kg)	0.014

## Emballage

Product EAN number	5410288301501
Longueur simple de l'emballage (cm)	4.5
Largeur simple de l'emballage (cm)	4.5
Packaging single depth (cm)	11.0
DUN14 (inner)	15410288301508
Units per outer package	6
Packaging outer length / height (cm)	14.3
Packaging outer width (cm)	9.7
Packaging outer depth (cm)	12.0

## Sécurité

Condition de fonctionnement optimal (° C)	-20-40
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	Yes
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures