

Raiden IP66 21KLM 840 Symmetric Narrow

Code article 2824069


Concord



Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 21200lm, 157W, 135lm/W, CRI80, Symmetric Narrow beam angle 25°, 100000 hrs L90B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.6kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

Atouts techniques

Dimensions (mm)

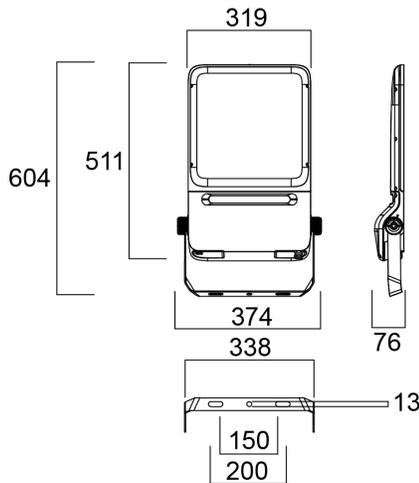


Photométrie

Distance [m]	Cone diameter [m]	E ₀ ' [lx]	E ₁₀ ' [lx]	E ₅₀ ' [lx]
0.5	0.23	20891	1281	19860
1.0	0.45	5303	320	4978
1.5	0.66	2340	144	2217
2.0	0.91	1591	104	1584
2.5	1.14	1023	78	1056
3.0	1.36	763	58	804

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 25.6°)

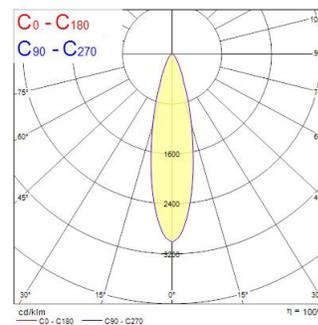

Raiden IP66 21KLM 840 Symmetric Narrow

Code article 2824069

Concord

Données générales

Nom du produit	Raiden IP66 21KLM 840 Symmetric Narrow
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	21200
Luminaire efficacy (lm/W)	135
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	25
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	157
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	3200
Courant d'appel (A)	110
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	7
Max. products per 16A C Breaker	10
Max. products per 20A C Breaker	12
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	4
Max. products per 16A B Breaker	6
Max. products per 20A B Breaker	7
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	94000
Lifespan L90 B50	100000

Raiden IP66 21KLM 840 Symmetric Narrow

Code article 2824069

Concord

Données physiques

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Longueur (mm)	511
Largeur (mm)	319
Nominal Product Height (mm)	76
Poids (kg)	6.6

Emballage

Product EAN number	5025768240692
Longueur simple de l'emballage (cm)	56.0
Largeur simple de l'emballage (cm)	41.5
Packaging single depth (cm)	14.0
DUN14 (inner)	05025768240692
Units per outer package	1
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	41.5
Packaging outer depth (cm)	14.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-40-50