


# Pixo Small 1700lm 940 NB MB WB DALI White

Code article 0004558

**SYLVANIA**


**PRO**<sup>TM</sup>

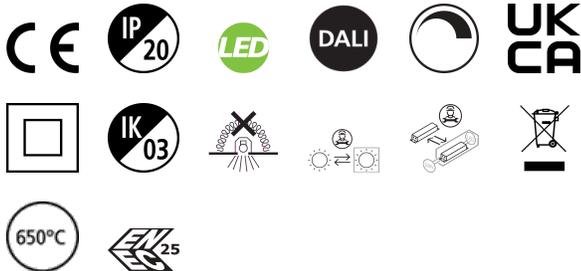

Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1700lm, efficacy: 121lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx130mm, length of the Adaptor : 198mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.

## Atouts techniques

### Dimensions (mm)

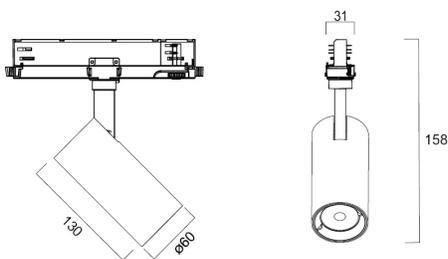

### Photométrie


Distance [m]	Cone diameter [m]	E107	E108	E109	Illuminance [lx]
0.5	0.32 0.22	2908	1028	1028	2908
1.0	0.43 0.45	5477	2571	2567	5477
1.5	0.65 0.67	2424	1143	1141	2424
2.0	0.86 0.89	1369	642	642	1369
2.5	1.08 1.12	876	411	411	876
3.0	1.30 1.34	600	286	286	600

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C2 - C180 (Half beam angle: 25.2°)  
 — C50 - C270 (Half beam angle: 24.4°)

# Pixo Small 1700lm 940 NB MB WB DALI White

Code article 0004558

**SYLVANIA**

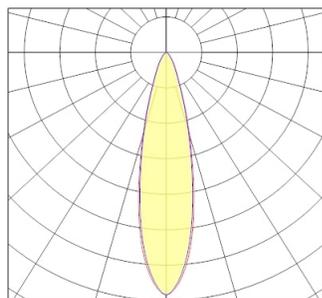

## Données générales

Nom du produit	Pixo Small 1700lm 940 NB MB WB DALI White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Built in presence detector	NONE
General application	Museums & Galleries, Retail, Office, Residential & Consumer
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4279609
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	121
Température de couleur (K)	4000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	14
Actuel (A)	0.06
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Courant d'appel (A)	10
Inrush Duration (µs)	3
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	96
Max. products per 13A C Breaker	125
Max. products per 16A C Breaker	154
Max. products per 20A C Breaker	192
Max. products per 10A B Breaker	60
Max. products per 13A B Breaker	78
Max. products per 16A B Breaker	96
Max. products per 20A B Breaker	120

# Pixo Small 1700lm 940 NB MB WB DALI White

Code article 0004558

**SYLVANIA**

## Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	100000
Lifespan L80 B20	100000
Lifespan L80 B10	100000
Lifespan L90 B50	100000
Lifespan L90 B20	100000
Lifespan L90 B10	100000

## Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Finition réflecteur	High-gloss
Longueur (mm)	130
Nominal Product Diameter (mm)	60
Poids (kg)	0.426

## Emballage

Product EAN number	5410288045580
Longueur simple de l'emballage (cm)	24.0
Largeur simple de l'emballage (cm)	9.5
Packaging single depth (cm)	19.3
DUN14 (inner)	15410288045587
Units per outer package	16
Packaging outer length / height (cm)	50.5
Packaging outer width (cm)	40.0
Packaging outer depth (cm)	41.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-25