

# Resisto 1200 HE IP65 2800lm 840 SSE

Code article 0010238

**SYLVANIA**


**PRO**<sup>TM</sup>



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 20W; 140lm/W; 4000K; SDCM<5; CRI80; IP66; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1293mm x 87mm x 80mm; D-mark; SylSmart Connected Industry enabled.

## Atouts techniques

### Dimensions (mm)

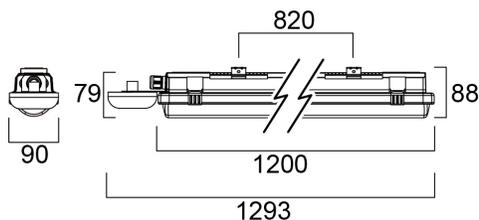


### Photométrie

Distance [m]	Cone diameter [m]	E107 [lx]	E100 [lx]	E10 [lx]
0.5	1.30 1.36	2681	416	274
1.0	2.61 2.76	670	104	68
1.5	3.91 4.13	453	68	45
2.0	5.21 5.51	339	51	34
2.5	6.52 6.88	271	41	27
3.0	7.82 8.26	223	34	22

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 108.0°)  
— C90 - C270 (Half beam angle: 108.0°)

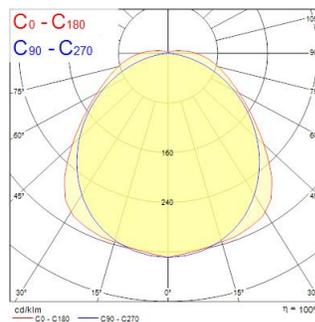

# Resisto 1200 HE IP65 2800lm 840 SSE

Code article 0010238

**SYLVANIA**

## Données générales

Nom du produit	Resisto 1200 HE IP65 2800lm 840 SSE
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	SYLSMART_SSE_PIR
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	140
Température de couleur (K)	4000
IRC (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 22
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	20
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	SylSmart SSE
Minimum dimming level (%)	1
Drive current (mA)	350
Courant d'appel (A)	30
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A B Breaker	10
Max. products per 16A B Breaker	16

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

# Resisto 1200 HE IP65 2800lm 840 SSE

Code article 0010238

**SYLVANIA**

## Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
IK rating of sensor	IK03
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Longueur (mm)	1293
Largeur (mm)	87
Nominal Product Height (mm)	80

## Emballage

Product EAN number	5410288102382
Longueur simple de l'emballage (cm)	120.5
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102382
Units per outer package	1
Packaging outer length / height (cm)	120.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40