

OTAO LINEAR 1.2 REF WHT 830/840 DALI BK

Codice n. 0040805

SYLVANIA


PROTM




Linear LED Luminaire, RAL9011 (black) finishing, direct distribution, standard surface mounted version complete with end caps and surface brackets, additional mounting options with accessories, 50mm wide extruded aluminium profile, lenses combined with white painted reflector, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, power and CCT switch options at the back of the luminaire, colour temperature: 3000K/4000K CCT options, CRI (Ra) >80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), DALI driver, 4-steps combined dip-switch for direct and D/I light distribution, 2-steps power dip switch in direct mode (22-24W), max system power: 24W, max fixture output: 3500lm @ 4000K CCT, efficacy at max output 146lm/W, additional 2-steps power dip switch when indirect module added (34-36W), max system power in D/I combination: 36W, max fixture output: 5050lm @ 4000K CCT, efficacy at max output 140lm/W, electrical protection: Class I, IP20 ingress protection, IK03 impact resistance level, suitable for indoor environment only, lifespan: 100,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, nominal size: 1147x50x73mm, shipped with through wiring.

Dati tecnici

Dimensioni (mm)

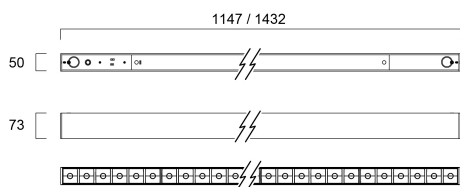

Fotometrie



OTAO LINEAR 1.2 REF WHT 830/840 DALI BK

Codice n. 0040805

SYLVANIA

Dati vita utile

Vita utile nominale - L70 B50	100000
Vita utile nominale - L80 B50	100000

Dati dimensionali

Colore del prodotto	RAL 9011 - Nero grafite
Classificazione IP	IP20
Classificazione IK	IK03
Finitura del diffusore	Altro
Materiale del diffusore	Altro
Finitura del riflettore	Non applicabile
Lunghezza nominale del prodotto (mm)	1147
Larghezza nominale prodotto (mm)	50
Altezza nominale prodotto (mm)	73
Peso (Kg)	1.9

Dati di imballo

Codice EAN prodotto	5410288408057
Lunghezza/altezza imballo singolo (cm)	122.0
Larghezza imballo singolo (cm)	6.1
Profondità imballo interno (cm) (singolo)	7.8
DUN14_2	15410288408054
Quantità per imballo esterno	4
Lunghezza/ Altezza imballo esterno (cm)	124.0
Packaging outer width (cm)	14.2
Profondità imballo esterno (cm)	19.4

Dati di sicurezza

Test del filo incandescente (°)	650
Temperatura ottimale di utilizzo (°C)	5-50