

# Kalani IP66 39KLM 830 WB

Code article 0048532


**SYLVANIA**



Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 38200lm, 300W, 127lm/W, CRI80, Symmetrical Wide beam angle (60°), 100000 hrs L80B20 lifespan, 567 x 465 x 97mm (LxWxD) dimensions, 9.6kg weight.

## Atouts techniques

### Dimensions (mm)

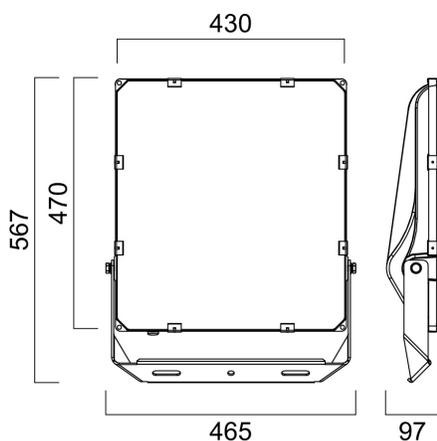


### Photométrie

0.5	0.56	5071	5100	15773	52714
1.0	1.11	5071	5100	39270	13179
1.5	1.67	5071	5100	17430	5807
2.0	2.23	5071	5100	9617	3209
2.5	2.78	5071	5100	6230	2109
3.0	3.34	5071	5100	4360	1464

Distance [m]    Cone diameter [m]    Illuminance [lx]

CO - C180 (Half beam angle: 58.2°)

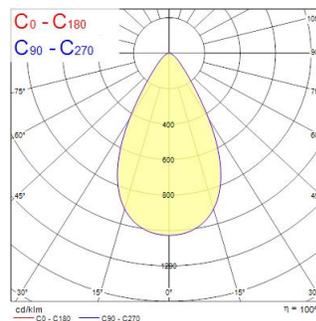

# Kalani IP66 39KLM 830 WB

Code article 0048532

**SYLVANIA**

## Données générales

Nom du produit	Kalani IP66 39KLM 830 WB
Technologie	LED
Cap/Base	N/A
General application	Logistics & Industry
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4579563
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	38200
Luminaire efficacy (lm/W)	127
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	300
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.97
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	5650
Courant d'appel (A)	80
Inrush Duration (µs)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	2
Max. products per 13A C Breaker	3
Max. products per 16A C Breaker	4
Max. products per 20A C Breaker	5
Max. products per 10A B Breaker	1
Max. products per 13A B Breaker	1
Max. products per 16A B Breaker	2
Max. products per 20A B Breaker	3
Mains surge immunity (differential mode -> L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000

# Kalani IP66 39KLM 830 WB

Code article 0048532

**SYLVANIA**

## Données physiques

IP rating	IP66
IK rating	IK08
Longueur (mm)	567
Largeur (mm)	465
Nominal Product Height (mm)	97
Poids (kg)	9.6

## Emballage

Product EAN number	5410288485324
Longueur simple de l'emballage (cm)	66.0
Largeur simple de l'emballage (cm)	16.0
Packaging single depth (cm)	51.0
DUN14 (inner)	05410288485324
Units per outer package	1
Packaging outer length / height (cm)	66.0
Packaging outer width (cm)	16.0
Packaging outer depth (cm)	51.0