

# Concord

## Raiden IP66 21KLM 830 Asymmetric Wide DALI 2824042



### Features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 3000K, DALI dimmable, 20100lm, 157W, 128lm/W, CRI80, Asymmetric Wide beam angle 110\*50°, 100000 hrs L80B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.8kg weight.


### Product Overview

Product name	Raiden IP66 21KLM 830 Asymmetric Wide DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Fixture luminous flux (lm)	20100
Luminaire efficacy (lm/W)	128
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	110*50
Photobiological Risk Group	RG1
Total power consumption (W)	157
Electrical protection	Class I
Dimmable	Yes
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768240425
Warranty	5 years


# Concord

## Raiden IP66 21KLM 830 Asymmetric Wide DALI 2824042

### Photometry

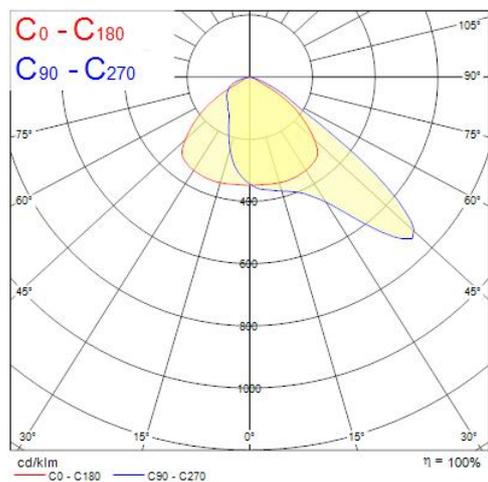

### Technical drawings

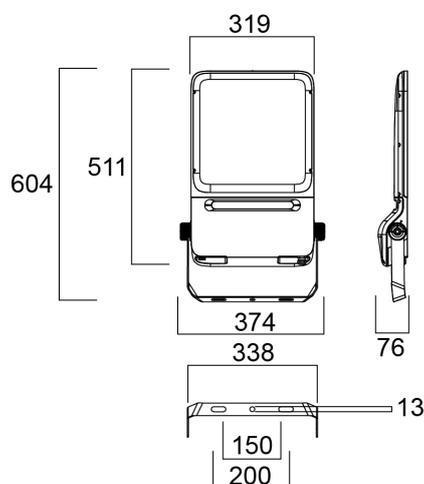

### Data table

#### GENERAL DATA

Product name

Raiden IP66 21KLM 830 Asymmetric Wide DALI

# Concord

## Raiden IP66 21KLM 830 Asymmetric Wide DALI 2824042

Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C - 50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	20100
Luminaire efficacy (lm/W)	128
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	Not Applicable
Beam Angle (°)	110*50
Photobiological Risk Group	RG1

### ELECTRICAL DATA

Total power consumption (W)	157
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Transformer required	No
Dimmable	Yes
Drive current (mA)	3200
Inrush Current (A)	125
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

# Concord

## Raiden IP66 21KLM 830 Asymmetric Wide DALI 2824042

Max. Luminaires per 10A C Breaker	6
Max. Luminaires per 13A C Breaker	5
Max. Luminaires per 16A C Breaker	6
Max. Luminaires per 20A C Breaker	8
Max. Luminaires per 10A B Breaker	3
Max. Luminaires per 13A B Breaker	3
Max. Luminaires per 16A B Breaker	3
Max. Luminaires per 20A B Breaker	4

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	94000

### PHYSICAL DATA

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	511
Nominal Product Width (mm)	319
Nominal Product Height (mm)	76
Nominal Product Diameter (mm)	Not applicable
Weight (kg)	6.8

### PACKAGING

Single packaging type	Carton
Product EAN number	5025768240425
Packaging single length / height (cm)	56.0
Packaging single width (cm)	41.5
Packaging single depth (cm)	14.0
DUN14 (outer)	05025768240425
Units per outer package	1
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	41.5
Packaging outer depth (cm)	14.0

# Concord

Raiden IP66 21KLM 830 Asymmetric Wide DALI  
**2824042**

---

## SAFETY DATA

---

Optimal operating condition (°C)	-40-50
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No