

# ToLED<sub>o</sub> PLATINUM T8 CCG L1500 3250LM 865 100K RL

Artikelnummer 0030254

**SYLVANIA**




Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes High lumen package - 3330lm High lumen efficacy - 196 lm/W Switching cycles - 200,000X Average life 100,000 hours lifespan Lamp length - 1500mm Wide beam angle High power factor Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots and maintenance free applications Suitable for operation with magnetic ballast (CCG) and direct mains operation (AC 220-240V) 5-Year warranty

## Technische Werte

### Größe (mm)

### Photometrie

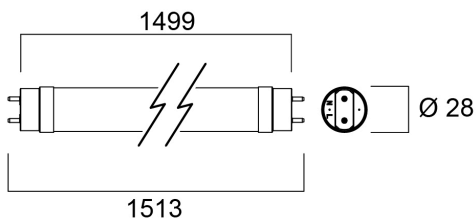

# ToLED<sub>o</sub> PLATINUM T8 CCG L1500 3250LM 865 100K RL

Artikelnummer 0030254

**SYLVANIA**

## Allgemeine Daten

Produktname	ToLED <sub>o</sub> PLATINUM T8 CCG L1500 3250LM 865 100K RL
Technologie	LED
Lampenform	Tube, double-ended
Sockel	G13
Lampenausführung	Frosted/Coated
Allgemeine Anwendungsbereiche	Hospitality, Logistics & Industry, Residential & Consumer, Retail
Umgebungstemperaturbereich	-20°C...+45°C
Virtual assistant compatibility	N/A
ETIM Klasse	EC001959
E-Nummer FI	4941369
Garantie	5 Jahre

## Optische Daten

Useful luminous flux ( $\Phi_{use}$ )	3250
Farbtemperatur (K)	6500
Lichtfarbe	Daylight
Farbwiedergabeindex (Ra)	80
Farbkonsistenz (SDCM)	SDCM6
Ausstrahlungswinkel (°)	170
Photobiological Risk Group	RG0

## Elektrische Daten

Power consumption (W)	17
Wattage (W)	17
Stromstärke (A)	0.08
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Leistungsfaktor der Lampe	0.9
Vorschaltgerät benötigt	No
Dimmbar	No
Einschaltstrom (A)	3
Dauer Einschaltstrom ( $\mu$ s)	100
Energie Aufkleber (Klasse)	B
Nennfrequenz (Hz)	50/60Hz

## Lifetime data

Lebensdauer - L70B50	100000
----------------------	--------

## Physikalische Daten

IP Schutzart	IP20
Länge (mm)	1499
Nominaler Produktdurchmesser (mm)	28
Gewicht (kg)	0.22

## Packaging

EAN Code	5410288302546
Einzelverpackung Länge (cm)	155.0
Einzelverpackung Breite (cm)	2.9
Einzelverpackung Tiefe (cm)	2.9
DUN 14 (außen)	15410288302543
Anzahl an Einheiten je Außenverpackung	10
Außenverpackung Länge (cm)	161.0
Außenverpackung Breite (cm)	22.0
Außenverpackung Tiefe (cm)	10.3

# ToLEDo PLATINUM T8 CCG L1500 3250LM 865 100K RL

Artikelnummer 0030254

**SYLVANIA**

## Safety data

Optimale Betriebstemperatur (°C)	-20-45
Reinigungsanweisungen bei Lampenbruch	Not applicable
Lampen für spezielle Einsatzbereiche	No
Geeignet für die Beleuchtung in privaten Haushalten	Yes
Safety message	Suitable for totally enclosed fixture