


# SylRadiance Step-DIM 1400LM

Code article 0090132

**SYLVANIA**


YourHome™

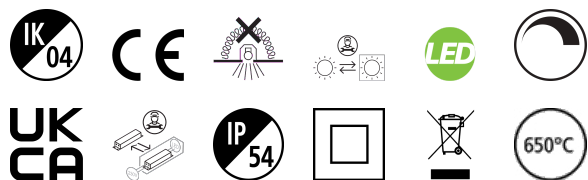

Integrated LED ceiling light available with suspension kit option High quality materials deliver consistent light quality, output and colour for its lifetime Halo ring effect function which visually pushes the luminaire forward from the background, giving the forward plane hierarchical priority 3-step dimmable levels: 100%, 50%, 10% Unique architecture, ultra-slim profile Available in 3 diameters: 235mm, 292mm, 400mm IP54 rated when installed as a ceiling light IP20 rated when suspended CRI > 80 Operating temperature range: -20 to +40°C Lifetime: 50,000hrs (L70B50) 3 years warranty

## Atouts techniques

### Dimensions (mm)

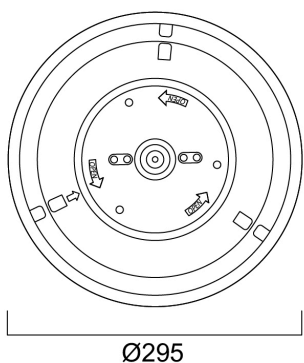

### Photométrie

# SylRadiance Step-DIM 1400LM

Code article 0090132

**SYLVANIA**

## Données générales

Nom du produit	SylRadiance Step-DIM 1400LM
Technologie	LED
Cap/Base	N/A
Housing	Polymer
Montage	Ceiling surface mounting
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	3 ans

## Données optiques

Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	77
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	105
Distribution type	Diffuse
Photobiological Risk Group	RG1

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	18
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	45
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	Switch-dim (mains-rated)
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	20
Max. products per 16A C Breaker	25
Max. products per 16A B Breaker	25
Connectable conductor cross section - Max (mm <sup>2</sup> )	0.25

## Durée de vie

Lifespan L70 B50	50000
Lifespan L80 B10	40000
Lifespan L90 B10	30000

## Données physiques

Housing colour	White
IP rating	IP54
IK rating	IK04
Diffuser finish	Frosted
Diffuser material	PMMA Acrylic
Nominal Product Height (mm)	28.5
Nominal Product Diameter (mm)	295
Poids (kg)	0.68

# SylRadiance Step-DIM 1400LM

Code article 0090132

**SYLVANIA**

## Emballage

Product EAN number	5410288901329
Longueur simple de l'emballage (cm)	31.5
Largeur simple de l'emballage (cm)	32.5
Packaging single depth (cm)	5.8
DUN14 (inner)	15410288901326
Units per outer package	6
Packaging outer length / height (cm)	37.6
Packaging outer width (cm)	32.8
Packaging outer depth (cm)	34.3

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40