


OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2

Artikelnummer 9200424


Concord

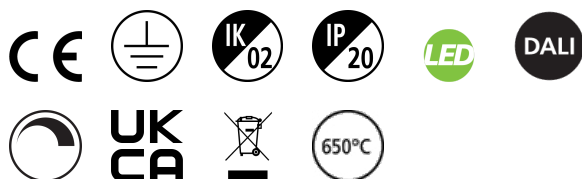

H-Track Ready Kit is a flexible linear track light system easy and fast to install, suitable for retail, museum, galleries, hospitality, and office environments. H- Track Ready Starter module - Complete with H-Track extruded aluminum body, LED light source, DALI control unit, quick connectors, opal diffuser and supply cable. H-Track Ready Starter kit supplied with live-end feed, prewired supply cable and a quick connector. Opal diffuser, light beam angle: 112° Textured white finishing colour. Light color temperature: 3000K, warm white, Total system power: 34.5W, Fixture lumen output: 2615lm, efficacy: 76lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), low flicker, DALI dimmable driverTrack part made of extruded aluminum body and copper conductors -L1/L2/L3/Neutral/ground 16A/440V + D+/D- 2x1A/50V FELV AC (DALI). Suitable for direct or indirect installation. Compatible with OneTrack, and Lytespan H-Track accessories (installation accessories are excluded). Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only. Nominal product dimensions: L.1405mmx31.4mmx83mm


Technische Werte

Größe (mm)

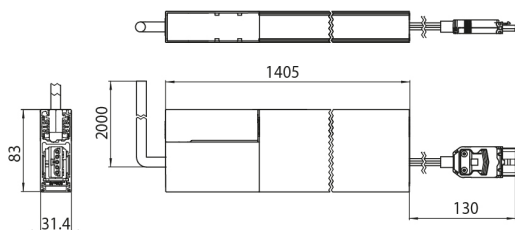

Photometrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Beam angle [°]
3.0	8.93 8.76	5100° 5100° 5100°	104 123.9° 124.4°	9
2.5	7.44 7.30	5100° 5100° 5100°	180 123.9° 124.4°	12
2.0	5.95 5.84	5100° 5100° 5100°	226 123.9° 124.4°	21
1.5	4.46 4.33	5100° 5100° 5100°	417 123.9° 124.4°	38
1.0	2.98 2.92	5100° 5100° 5100°	989 123.9° 124.4°	62
0.5	1.49 1.46	5100° 5100° 5100°	3705 123.9° 124.4°	327



OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2

Artikelnummer 9200424

Concord

Allgemeine Daten

Produktname	OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2
Technologie	LED
Sockel	N/A
Montage	Suspended
Built in presence detector	NONE
Umgebungstemperaturbereich	1°C...+25°C
ETIM Klasse	EC002892
Garantie	5 Jahre

Optische Daten

Leuchtenlichtstrom (lm)	2615
Systemeffizienz (lm/W)	76
Leuchtenbetriebswirkungsgrad (%)	100
Farbcode	930
Lichtfarbe	Warm White
Farbwiedergabeindex (Ra)	90
Farbkonsistenz (SDCM)	SDCM3
Ausstrahlungswinkel (°)	112
Distributionstyp	Diffuse
Photobiological Risk Group	RG0

Elektrische Daten

Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Leistungsfaktor der Lampe	0.95
Elektrische Schutzklasse	Class I
Vorschaltgerät benötigt	No
Betriebsgerätetyp	LED driver constant current
Dimmbar	Yes
Dimming method	DALI-2
Einschaltstrom (A)	10
Dauer Einschaltstrom (µs)	200
Energy Efficiency Class (A->G) of contained light source	F
Max. Anzahl Leuchten pro 10A C Sicherung	31
Max. Anzahl Leuchten pro 16A C Sicherung	51
Max. Anzahl Leuchten pro 16A B Sicherung	30
Connectable conductor cross section - Min (mm²)	7.5
Connectable conductor cross section - Max (mm²)	7.5

Physikalische Daten

Gehäusefarbe	RAL 9010 - Pure white
IP Schutzart	IP20
IK Schutzart	IK02
Länge (mm)	1405
Breite (mm)	31.4
Nominale Produkthöhe (mm)	83
Gewicht (kg)	4.0

OT H-Trk Ready Starter 930 DALI Wh H32S1405/w5-o-2

Artikelnummer 9200424

Concord

Packaging

Verpackungsbezeichnung	Carton
EAN Code	4012289004248
Einzelverpackung Länge (cm)	10.0
Einzelverpackung Breite (cm)	10.0
Einzelverpackung Tiefe (cm)	150.0
Anzahl an Einheiten je Außenverpackung	1
Außenverpackung Länge (cm)	10.0
Außenverpackung Breite (cm)	10.0
Außenverpackung Tiefe (cm)	150.0

Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	1-25