


# SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865

Code article 0042801

**SYLVANIA**


YourHome

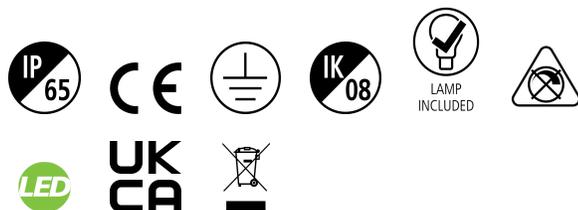

Weatherproof luminaire delivered together with exchangeable ToLEDo T8 LED tubes. Easy to install with stainless steel fixing brackets for ceiling mounting. Polycarbonate housing and diffuser. 6500K; 39W; 3300lm; 85lm/W and 25,000 hours lifetime. IP65; IK08; Class I; 1260mm x 99mm x 78mm

## Atouts techniques


### Dimensions (mm)

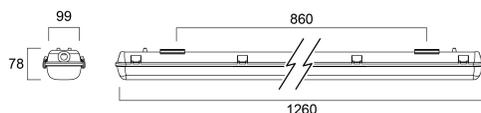

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle	Illuminance [lx]
0.5	1.37 3.87	51° 151°	3300 240
1.0	2.73 7.73	51° 151°	780 60
1.5	4.10 11.60	51° 151°	330 24
2.0	5.47 15.47	51° 151°	190 12
2.5	6.83 19.33	51° 151°	130 8
3.0	8.20 23.20	51° 151°	85 6

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 151.0°)  
 — C90 - C270 (Half beam angle: 107.6°)

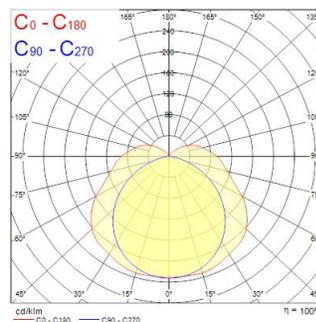

# SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865

Code article 0042801

**SYLVANIA**

## Données générales

Nom du produit	SylProof ToLEDo T8 Twin 1200 IP65 3300Lm 865
Technologie	LED
Cap/Base	G13
Housing	PC Polycarbonate
Montage	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC002892
Warranty	3 ans

## Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1260
Largeur (mm)	99
Nominal Product Height (mm)	78
Poids (kg)	1.69

## Données optiques

Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	85
Température de couleur (K)	6500
Couleur de lumière	Daylight
IRC (Ra)	80
Photobiological Risk Group	Not applicable
Maintien du flux à la fin de la durée de vie nominale (lm)	70

## Emballage

Product EAN number	5410288428017
Longueur simple de l'emballage (cm)	126.8
Largeur simple de l'emballage (cm)	11.0
Packaging single depth (cm)	8.0
DUN14 (inner)	15410288428014
Units per outer package	72
Packaging outer length / height (cm)	128.5
Packaging outer width (cm)	74.0
Packaging outer depth (cm)	90.0

## Caractéristiques électriques

Lampe incluse	0029296
Consommation électrique totale (W)	39
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Electrical protection	Class I
No. Of switching cycles before premature failures	>200000
Dimmable	No
Dimming method	N/A
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz