


# YOURHOME SYLWALL UPDOWN

Code article 0090193

**SYLVANIA**

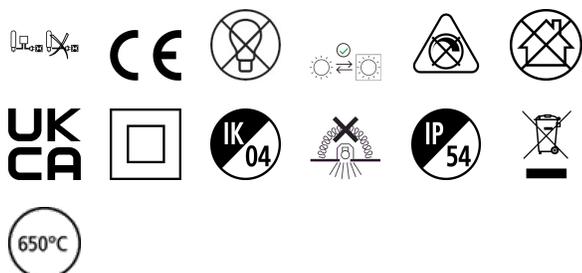

Enhance your outdoor space with our sleek and modern twin wall light, featuring a stylish black powder-coated finish. Built to withstand the elements with an IP54 rating, this durable fixture is compatible with LED GU10 and SylSmart colour-changing lamps (not included), offering versatile lighting options. With a long 30,000-hour lifetime and a 3-year warranty, it's the perfect blend of style, performance, and reliability

## Atouts techniques

### Photométrie

#### Données générales

Nom du produit	YOURHOME SYLWALL UPDOWN
Technologie	Light Source Not Integrated
Cap/Base	GU10
Housing	Aluminium
Montage	Wall surface mounted
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	3 ans

#### Données optiques

Fixture luminous flux (lm)	1
Luminaire efficacy (lm/W)	1
Couleur de lumière	N/A
Colour Variation Initial (SDCM)	N/A
Distribution type	None
Photobiological Risk Group	Not applicable

# YOURHOME SYLWALL UPDOWN

Code article 0090193

**SYLVANIA**

## Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Consommation électrique totale (W)	1
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	1
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	Not required
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	N/A
Max. products per 10A C Breaker	1
Max. products per 16A C Breaker	1
Max. products per 16A B Breaker	1
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Données physiques

Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK04
Diffuser finish	Other
Diffuser material	None
Longueur (mm)	108
Largeur (mm)	60
Nominal Product Height (mm)	170
Poids (kg)	0.37

## Emballage

Product EAN number	5410288901930
Longueur simple de l'emballage (cm)	18.0
Largeur simple de l'emballage (cm)	12.0
Packaging single depth (cm)	7.0
DUN14 (inner)	15410288901937
Units per outer package	16
Packaging outer length / height (cm)	38.0
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	26.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (°C)	-20-40