


# START Panel 1200x300 HE 4100Lm 840 LILO

Code article 0042879


**SYLVANIA**

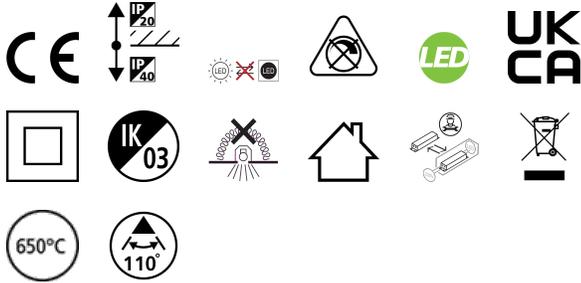

LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<22. RG0, 110 degree beam angle, optical system: PS diffuser with Opal finish. Light color temperature: 4000K Neutral White, total system power: 34W, total fixture output: 4100lm, efficacy: 121 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, non dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 1195x295mm, Loop in / loop out wiring, safety cables included, 25mm nominal height, White color frame, weight: 1,9Kg.

## Atouts techniques


### Dimensions (mm)



### Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.44 1.53	0.70 0.75	5487 5071
1.0	2.88 3.06	1.40 1.50	1374 1268
1.5	4.32 4.58	2.10 2.25	611 568
2.0	5.76 6.11	2.80 3.00	344 321
2.5	7.20 7.64	3.50 3.75	220 207
3.0	8.67 9.17	4.20 4.50	150 140

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 113.6°)  
 — C90 - C270 (Half beam angle: 110.6°)



# START Panel 1200x300 HE 4100Lm 840 LILO

Code article 0042879

**SYLVANIA**

## Données générales

Nom du produit	START Panel 1200x300 HE 4100Lm 840 LILO
Technologie	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4278474
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	4100
Luminaire efficacy (lm/W)	121
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 22
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	34
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	900
Courant d'appel (A)	20
Inrush Duration (µs)	170
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	51
Max. products per 13A C Breaker	66
Max. products per 16A C Breaker	81
Max. products per 20A C Breaker	102
Max. products per 10A B Breaker	33
Max. products per 13A B Breaker	43
Max. products per 16A B Breaker	54
Max. products per 20A B Breaker	68
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	71000

# START Panel 1200x300 HE 4100Lm 840 LILO

Code article 0042879

**SYLVANIA**

## Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	Other
Longueur (mm)	1195
Largeur (mm)	295
Nominal Product Height (mm)	25
Poids (kg)	1.654

## Emballage

Product EAN number	5410288428796
Longueur simple de l'emballage (cm)	121.7
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	34.3
DUN14 (inner)	15410288428793
Units per outer package	1
Packaging outer length / height (cm)	121.7
Packaging outer width (cm)	3.8
Packaging outer depth (cm)	34.3

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45