

EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V

Codice n. 0046603

SYLVANIA


PRO
TM



The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages (Vf) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². DALI functionality. NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Dati tecnici

Dimensioni (mm)

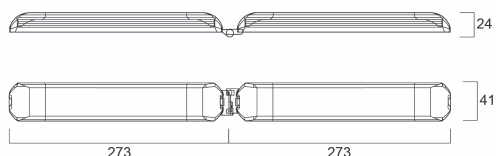

Fotometrie

EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V

Codice n. 0046603

SYLVANIA

Dati generali

Nome prodotto	EMERGENCY PACK SELF TEST/DALI MONITORING 50V-200V
Tecnologia	Kit di emergenza
Ambiente	Interni
Applicazione generale	Istruzione, Strutture alberghiere, Uffici, Esercizi commerciali
Classe ETIM	EC000471
Garanzia	5 anni

Dati dimensionali

Peso (Kg)	0.47
-----------	------

Dati di imballo

Codice EAN prodotto	5410288466033
Lunghezza/altezza imballo singolo (cm)	28.5
Larghezza imballo singolo (cm)	10.0
Profondità imballo interno (cm) (singolo)	4.5
DUN14_2	05410288466033
Quantità per imballo interno	1
Quantità per imballo esterno	25
Lunghezza/ Altezza imballo esterno (cm)	46.0
Packaging outer width (cm)	31.0
Profondità imballo esterno (cm)	30.0

Dati di sicurezza

Utilizzabile solo in applicazioni asciutte	Sì
--	----