


START WATERPROOF 1500 HOUSING 1X

Code article 0047195

SYLVANIA


STARTTM

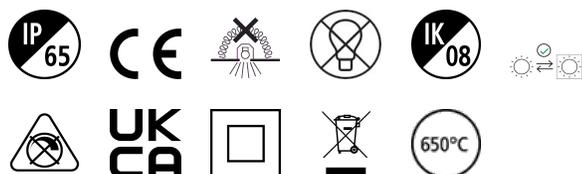

• Luminaire, polycarbonate housing • Single version, 1500mm • Protection type IP65 • Luminous flux and light colour vary depending on LED tubes used • To be used with T8 LED tubes • Easy to install with stainless steel fixing brackets included for ceiling mounting • Ideal for any industrial facilities, garages, car parks, workshops.

Atouts techniques

Dimensions (mm)

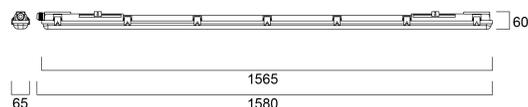

Photométrie

START WATERPROOF 1500 HOUSING 1X

Code article 0047195

SYLVANIA

Données générales

| | |
|----------------------------------|----------------------------------|
| Nom du produit | START WATERPROOF 1500 HOUSING 1X |
| Technologie | LED |
| Cap/Base | 2G13 |
| Housing | PC Polycarbonate |
| Montage | Wall surface mounted |
| Built in presence detector | NONE |
| General application | Logistics & Industry |
| Operating temperature range (°C) | -20°C...+40°C |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC002892 |
| Numéro virtuel FI | 4357157 |
| Warranty | 5 ans |

Données optiques

| | |
|---------------------------------|----------------|
| Fixture luminous flux (lm) | 1 |
| Luminaire efficacy (lm/W) | 1 |
| Couleur de lumière | N/A |
| Colour Variation Initial (SDCM) | N/A |
| Distribution type | Symmetric |
| Photobiological Risk Group | Not applicable |

Caractéristiques électriques

| | |
|---|-----------------------------|
| Lampe incluse | Fixture without Lightsource |
| Consommation électrique totale (W) | 0.1 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x % | 10 |
| Electrical protection | Class II |
| Type d'appareillage | Not required |
| Dimmable | No |
| Dimming method | N/A |
| Nominal Frequency (Hz) | 50/60Hz |
| Max. products per 10A C Breaker | 1 |
| Max. products per 16A C Breaker | 1 |
| Max. products per 16A B Breaker | 1 |
| Connectable conductor cross section - Max (mm ²) | 1.5 |

Durée de vie

| | |
|------------------|-------|
| Lifespan L70 B50 | 25000 |
|------------------|-------|

Données physiques

| | |
|-----------------------------|------------------|
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Diffuser finish | Transparent |
| Diffuser material | PC Polycarbonate |
| Longueur (mm) | 1580 |
| Largeur (mm) | 65 |
| Nominal Product Height (mm) | 60 |
| Poids (kg) | 0.8 |

START WATERPROOF 1500 HOUSING 1X

Code article 0047195

SYLVANIA

Emballage

| | |
|--------------------------------------|----------------|
| Product EAN number | 5410288471952 |
| Longueur simple de l'emballage (cm) | 163.5 |
| Largeur simple de l'emballage (cm) | 6.4 |
| Packaging single depth (cm) | 4.5 |
| DUN14 (inner) | 15410288471959 |
| Units per outer package | 12 |
| Packaging outer length / height (cm) | 165.0 |
| Packaging outer width (cm) | 15.9 |
| Packaging outer depth (cm) | 28.4 |

Sécurité

| | |
|---|--------|
| Glow Wire Test (°C) | 650 |
| Condition de fonctionnement optimal (° C) | -20-40 |