


LiFeSafe Multifix Exit Sign EX C EM3 NM/MT ST

Code article 0032018

SYLVANIA


LiFeSafe™

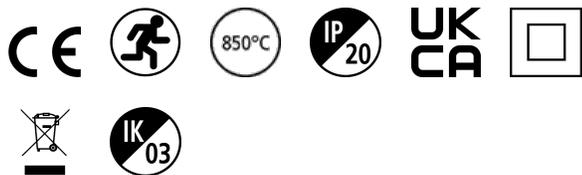

A range of Self-test emergency lighting luminaires designed to be flexible to mount to different surfaces delivering 3 hours of emergency lighting with a viewing distance of up to 30m. Surface, recessed, suspended, wall or flag mounting options are available as kits. The product includes six ISO7010 legends: Left, Right, 2 x Up and 2 x Down and is finished in an elegant White (RAL9016) PC housing. This product offers the option to select Maintained or Non-maintained operation using the latest LiFePO4 battery technology for better charging, longer life and cleaner operation. This product has an operating temperature range from 0 to + 45°C, complies with EN 60598-2-22 and a Lifetime 30,000 hrs.

Atouts techniques

Dimensions (mm)

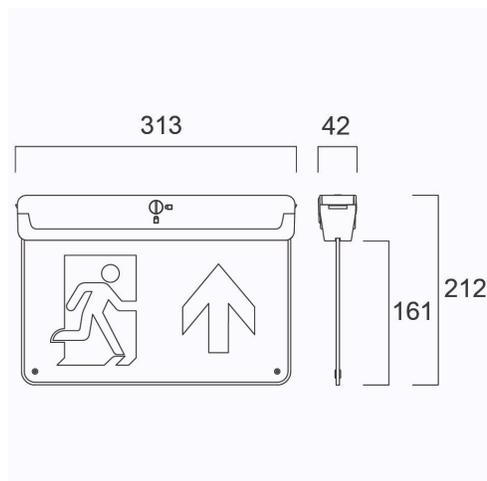

Photométrie

LiFeSafe Multifix Exit Sign EX C EM3 NM/MT ST

Code article 0032018

SYLVANIA

Données générales

Nom du produit	LiFeSafe Multifix Exit Sign EX C EM3 NM/MT ST
Technologie	LED
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting, Wall surface mounted, Ceiling surface mounting, Suspended
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	0°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001957
Warranty	5 ans

Données optiques

Luminaire efficacy (lm/W)	20
Température de couleur (K)	6500
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Emergency duration (h)	3

Caractéristiques électriques

Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.3
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	134
Electrical protection	Class II
Control gear required	No
Courant d'appel (A)	4.39
Inrush Duration (µs)	100
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	225
Max. products per 13A C Breaker	293
Max. products per 16A C Breaker	361
Max. products per 20A C Breaker	451
Max. products per 10A B Breaker	194
Max. products per 13A B Breaker	253
Max. products per 16A B Breaker	311
Max. products per 20A B Breaker	389

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	83000
Lifespan L80 B20	70000
Lifespan L80 B10	68000
Lifespan L90 B50	40000
Lifespan L90 B20	34000
Lifespan L90 B10	33000

LiFeSafe Multifix Exit Sign EX C EM3 NM/MT ST

Code article 0032018

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Longueur (mm)	313
Largeur (mm)	212
Nominal Product Height (mm)	42
Poids (kg)	0.512

Emballage

Product EAN number	5410288320182
Longueur simple de l'emballage (cm)	21.7
Largeur simple de l'emballage (cm)	4.5
Packaging single depth (cm)	31.7
DUN14 (inner)	15410288320189
Units per outer package	10
Packaging outer length / height (cm)	44.5
Packaging outer width (cm)	25.5
Packaging outer depth (cm)	33.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	0-45