


# LIFESAFE PRO BH IP65 C EM3 NM/MT DA BLK

Code article 0038821

**SYLVANIA**


LiFeSafe

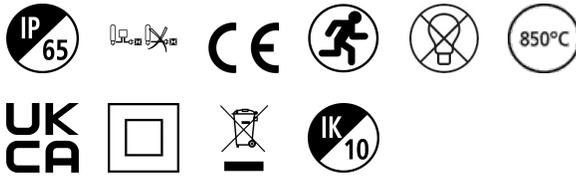

LiFeSafe PRO BH IP65 C EM3 NM/MT DA BLK is a black DALI addressable LED surface or recessed LED bulkhead. Black steel recessing kit available as an accessory. Maintained or Non-Maintained, 3Hr emergency duration, complete with 4 ISO7010 Exit legends, Left, Right, Up and Down. Maximum viewing distance 30m. 0 to +45°C operating temperature range. IK10, IP65, Class II electrical construction, 6-year warranty.

## Atouts techniques

### Dimensions (mm)

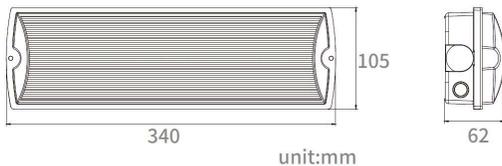

### Photométrie

# LIFESAFE PRO BH IP65 C EM3 NM/MT DA BLK

Code article 0038821

**SYLVANIA**

## Données générales

Nom du produit	LIFESAFE PRO BH IP65 C EM3 NM/MT DA BLK
Technologie	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting, Ceiling surface mounting, Side entry, Wall recessed, Wall surface mounted
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	0°C...+45°C
ETIM Class	EC001957
Warranty	6 years

## Données optiques

Fixture luminous flux (lm)	200
Luminaire efficacy (lm/W)	33.3
Température de couleur (K)	5000
IRC (Ra)	80
Photobiological Risk Group	RG0
Maintien du flux à la fin de la durée de vie nominale (lm)	85
Luminous flux (emergency) (lm)	200
Flux lumineux (d'urgence) (lm)	200
Emergency duration (h)	3

## Caractéristiques électriques

Lampe incluse	Fixture without Lightsource
Actuel (A)	0.02
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.40
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	84
Electrical protection	Class II
Control gear required	Yes
Type d'appareillage	LED driver constant current
Drive current (mA)	280
Courant d'appel (A)	30
Inrush Duration ( $\mu$ s)	220
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	121
Max. products per 13A C Breaker	157
Max. products per 16A C Breaker	194
Max. products per 20A C Breaker	243
Max. products per 10A B Breaker	182
Max. products per 13A B Breaker	157
Max. products per 16A B Breaker	194
Max. products per 20A B Breaker	243
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Durée de vie

Lifespan L70 B10	109000
Lifespan L90 B10	35000

# LIFESAFE PRO BH IP65 C EM3 NM/MT DA BLK

Code article 0038821

**SYLVANIA**

## Données physiques

Housing colour	Black
IP rating	IP65
IK rating	IK10
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Longueur (mm)	340
Largeur (mm)	105
Nominal Product Height (mm)	62
Poids (kg)	0.36

## Emballage

Product EAN number	5410288388212
Longueur simple de l'emballage (cm)	46.0
Largeur simple de l'emballage (cm)	31.0
Packaging single depth (cm)	30.0
Units per outer package	1
Packaging outer length / height (cm)	46.0
Packaging outer width (cm)	31.0
Packaging outer depth (cm)	30.0

## Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	0 °C-45
Utilisation pour applications sèches uniquement	No