

START Panel UGR19 600x600 DALI 4000lm 840

Code article 0044639

SYLVANIA


STARTTM



LED Panel with backlit technology, ideal for general indoor lighting applications such as breakout areas, offices and meeting rooms. Extruded aluminium frame, passive cooling. Low glaring UGR<19. RG0, 90 degree beam angle , optical system: PS diffuser with Prismatic finish. Light color temperature: 4000K Neutral White, total system power: 30W , total fixture output: 4000lm, efficacy: 133 lm/W, Ra80 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), lifespan: 100,000 hours at 70% of the original output (L70B50), IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, low flicker, DALI dimmable driver, electrical protection: Class II. Degree of Protection: IP40/IP20, suitable for indoor environment only. Nominal size: 595x595mm, Loop in / loop out wiring, safety cables & quick connector included, 26mm nominal height, White color frame, weight: 2,07Kg.


Atouts techniques

Dimensions (mm)

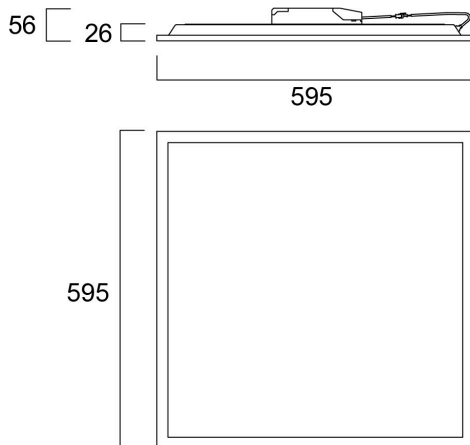

Photométrie

Distance [m]	Cone diameter [m]	E175 E180 E185	E190 E195 E200	E205 E210 E215	E220 E225 E230	E235 E240 E245	E250 E255 E260	E265 E270 E275	E280 E285 E290	E295 E300 E305	E310 E315 E320	E325 E330 E335	E340 E345 E350	E355 E360 E365	E370 E375 E380	E385 E390 E395	E400 E405 E410	E415 E420 E425	E430 E435 E440	E445 E450 E455	E460 E465 E470	E475 E480 E485	E490 E495 E500																																												
0.5	0.83 0.86	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500
1.0	1.63 1.76	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500
1.5	2.40 2.64	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500
2.0	3.20 3.53	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500
2.5	4.01 4.41	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500
3.0	4.81 5.29	175	180	185	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355	360	365	370	375	380	385	390	395	400	405	410	415	420	425	430	435	440	445	450	455	460	465	470	475	480	485	490	495	500



START Panel UGR19 600x600 DALI 4000lm 840

Code article 0044639

SYLVANIA

Données générales

Nom du produit	START Panel UGR19 600x600 DALI 4000lm 840
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting, Suspended
Built in presence detector	NONE
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Numéro virtuel FI	4279390
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	133
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	30
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15.0
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Drive current (mA)	700
Courant d'appel (A)	5.6
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	37
Max. products per 13A C Breaker	48
Max. products per 16A C Breaker	59
Max. products per 20A C Breaker	74
Max. products per 10A B Breaker	37
Max. products per 13A B Breaker	48
Max. products per 16A B Breaker	59
Max. products per 20A B Breaker	74
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	2.5

START Panel UGR19 600x600 DALI 4000lm 840

Code article 0044639

SYLVANIA

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	94000
Lifespan L80 B20	76000
Lifespan L80 B10	67000
Lifespan L90 B50	45000
Lifespan L90 B20	37000
Lifespan L90 B10	33000

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PS Polystyrene
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	26
Poids (kg)	1.958

Emballage

Product EAN number	5410288446394
Longueur simple de l'emballage (cm)	60.3
Largeur simple de l'emballage (cm)	3.8
Packaging single depth (cm)	69.0
DUN14 (inner)	15410288446391
Units per outer package	4
Packaging outer length / height (cm)	71.4
Packaging outer width (cm)	17.6
Packaging outer depth (cm)	64.2

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-45