

START eco Surface Wall Round IP54

880lm 830 WHT

Code article 0047933


SYLVANIA



Exterior surface wall light luminaire, Round shape, white aluminium - RAL9016, 880lm, 12W, 73lm/W, 3000K, Driver Current: 60mA, CRI:80+, 220-240V, IP54, IK05, 30.000 hrs (L70), (HxWxD) 50x202x202mm, Class 1, energy class: A++, A+, A

Atouts techniques


Dimensions (mm)

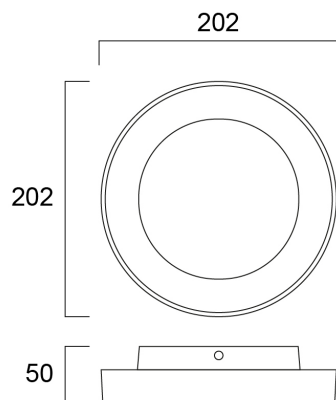

Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	1.44	50°	50°	1238
1.0	2.89	50°	50°	309
1.5	4.33	50°	50°	135
2.0	5.78	50°	50°	77
2.5	7.22	50°	50°	50
3.0	8.67	50°	50°	34

Distance [m] Cone diameter [m]
— C0 - C180 (Half beam angle: 110.6°)



START eco Surface Wall Round IP54 880lm 830 WHT

Code article 0047933

SYLVANIA

Données générales

Nom du produit	START eco Surface Wall Round IP54 880lm 830 WHT
Technologie	LED
Housing	Aluminium
Environment	External
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	3 ans

Données optiques

Fixture luminous flux (lm)	880
Luminaire efficacy (lm/W)	73
Température de couleur (K)	3000
Colour Code	830
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	12
Actuel (A)	0.09
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.6
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	95.0
Electrical protection	Class I
Dimmable	No
Drive current (mA)	60
Courant d'appel (A)	10
Inrush Duration (µs)	250
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	50
Max. products per 13A C Breaker	65
Max. products per 16A C Breaker	80
Max. products per 20A C Breaker	100

Durée de vie

Lifespan L70 B50	30000
------------------	-------

Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP54
IK rating	IK05
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	50
Nominal Product Diameter (mm)	202
Poids (kg)	0.84

START eco Surface Wall Round IP54 880lm 830 WHT

Code article 0047933



Emballage

Product EAN number	5410288479330
Longueur simple de l'emballage (cm)	23.5
Largeur simple de l'emballage (cm)	24.0
Packaging single depth (cm)	9.0
DUN14 (inner)	15410288479337
Units per outer package	6
Packaging outer length / height (cm)	25.5
Packaging outer width (cm)	74.0
Packaging outer depth (cm)	20.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-45