



PRO™

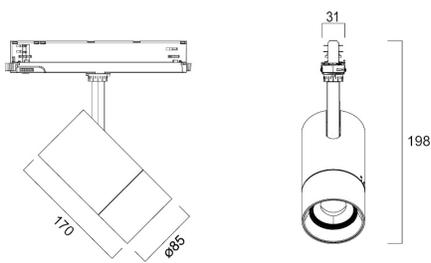

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.14	8171
	0.16	6996
1.0	0.27	1951
	0.31	1674
1.5	0.41	838
	0.47	715
2.0	0.54	391
	0.63	332
2.5	0.68	193
	0.78	165
3.0	0.81	127
	0.94	109

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 17.8°) — C90 - C270 (Half beam angle: 15.4°)

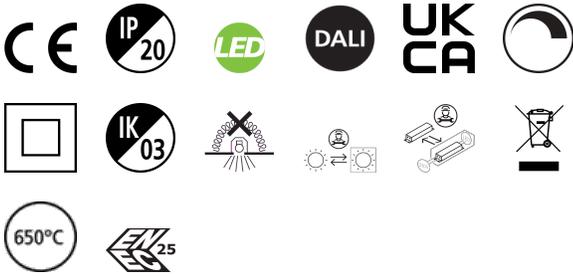