
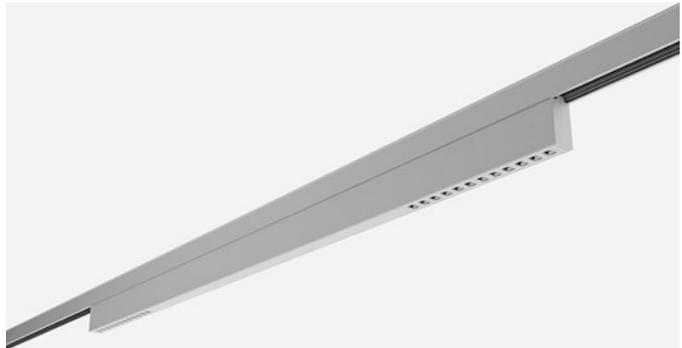


# Raxa UGR19 1500 CRI90 4000K White

Code article 2016477


**Concord**

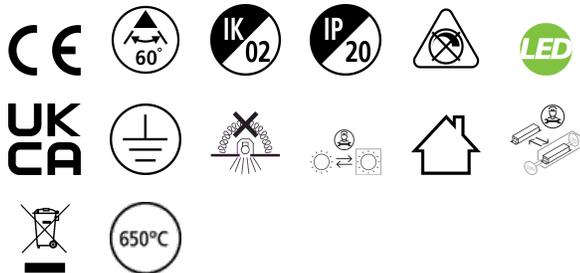

Raxa presents a refined solution for lighting needs, combining aesthetic finesse with functional excellence Raxa is a modular linear track system, easy and fast to install on 3-circuit tracks Specific track adaptor that guarantees a safe electrical connection Aluminum body with a slim profile, 32mm only, neat and seamless installation on OneTrack UGR19 lenses, light beam angle:60° Textured white finishing colour. Light color temperature: 4000K, neutral white, Total system power: 23W, Fixture lumen output: 1900lm, efficacy: 83lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse (SDCM3), IR/UV free light source without heat radiation, low flicker, non-dimmable driver Suitable for installation on 3-circuit tracks, please check compatibility list. COMPATIBLE WITH OneTrack, Lytespan Round, Lytespan H-Track. Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Nominal product dimensions: L.1426mmx32mmx75mm

## Atouts techniques


### Dimensions (mm)

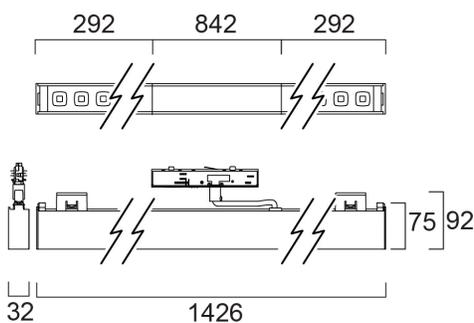

### Photométrie

Distance [m]	Cone diameter [m]	E10%	E10% <sup>2</sup>	E10% <sup>3</sup>	E10% <sup>4</sup>	E10% <sup>5</sup>	E10% <sup>6</sup>	E10% <sup>7</sup>	E10% <sup>8</sup>	E10% <sup>9</sup>	E10% <sup>10</sup>	Illuminance [lx]
0.5	0.56 0.56	829	279	279	279	279	279	279	279	279	279	279
1.0	1.10 1.17	207	86	86	86	86	86	86	86	86	86	86
1.5	1.66 1.75	99	38	38	38	38	38	38	38	38	38	38
2.0	2.21 2.34	57	23	23	23	23	23	23	23	23	23	23
2.5	2.76 2.92	39	16	16	16	16	16	16	16	16	16	16
3.0	3.31 3.51	29	12	12	12	12	12	12	12	12	12	12

Distance [m] Cone diameter [m] Illuminance [lx]  
 — C0 - C180 (Half beam angle: 60.0°)  
 — C90 - C270 (Half beam angle: 57.0°)

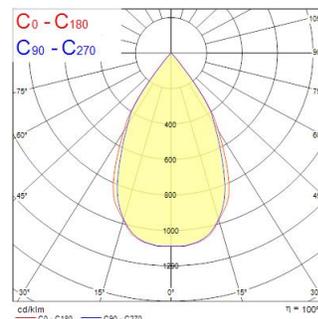

# Raxa UGR19 1500 CRI90 4000K White

Code article 2016477

# Concord

## Données générales

Nom du produit	Raxa UGR19 1500 CRI90 4000K White
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Track mounting
Built in presence detector	NONE
General application	Museums & Galleries, Office, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	83
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

## Caractéristiques électriques

Consommation électrique totale (W)	23
Actuel (A)	0.60
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.96
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	15
Electrical protection	Class I
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	600
Courant d'appel (A)	5
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	85
Max. products per 16A B Breaker	50

## Durée de vie

Lifespan L70 B50	60000
Lifespan L80 B50	60000
Lifespan L90 B50	41000
Lifespan L90 B10	50000

# Raxa UGR19 1500 CRI90 4000K White

Code article 2016477

**Concord**

## Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Other
Diffuser material	PC Polycarbonate
Finition réflecteur	Other
Longueur (mm)	1426
Largeur (mm)	32
Nominal Product Height (mm)	75
Poids (kg)	1.7

## Emballage

Product EAN number	5025768164776
Longueur simple de l'emballage (cm)	4.5
Largeur simple de l'emballage (cm)	10.5
Packaging single depth (cm)	145.5
DUN14 (inner)	05025768164776
Units per outer package	1
Packaging outer length / height (cm)	4.5
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	145.5

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-25