


Pixo Line Driver DALI 600 Black

Artikelnummer 0007868

SYLVANIA


PROTM

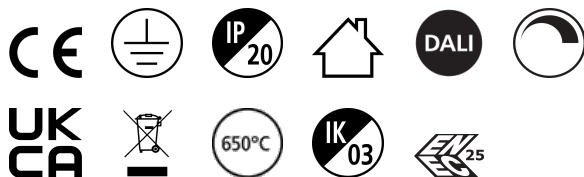

Pixo Line is a linear track system, adds flexibility to any space due the variety of product options Offers an easy installation with two separate modules Push-in/push-out mechanism with GR6d-15 connector Compatible with Zhaga Book 14 Constant current 350mA -1050mA digital dimmable DALI in-track driver with GR6d-15 connector for LED light modules, polycarbonate body Clip holder and fixing screw included in the driver box, black finishing colour, max. system power: 56W, operating voltage: 220-240V / 50-60Hz Driver module should be combined with suitable LED module. Switch-dim selection with 8 power settings meet all installation needs with one single product selection and setting on driver - between 17W (350mA), 19W (400mA), 24W (500mA), 29W (600mA), 34W (700mA), 38W (800mA), 43W (900mA), 50W (1050mA) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class I. Degree of protection: IP20, suitable for indoor environment only Light modules should be combined with suitable in-track drivers Nominal product dimensions: L.672mmx32mmx31mm

Technische Werte

Größe (mm)



Photometrie

Pixo Line Driver DALI 600 Black

Artikelnummer 0007868

SYLVANIA

Allgemeine Daten

Produktname	Pixo Line Driver DALI 600 Black
Technologie	Driver
Montage	Ceiling surface mounting
Allgemeine Anwendungsbereiche	Retail, Hospitality, Museums & Galleries, Office
Umgebungstemperaturbereich	-20°C...+40°C
ETIM Klasse	EC002710
E-Nummer FI	4279421
Garantie	5 Jahre

Optische Daten

Lichtfarbe	N/A
Photobiological Risk Group	Not applicable

Elektrische Daten

Leistungsaufnahme gesamt (W)	56
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Leistungsfaktor der Lampe	0.95
THD (bei 230V, 50Hz, bei 100% Dimm-Level)	10
Elektrische Schutzklasse	Class I
Anzahl der Schaltzyklen vor vorzeitigem Ausfall	>100000
Dimmbar	Yes
Dimming method	DALI
Min. drive current (mA)	350
Max. drive current (mA)	1050
Drive current - Range (mA)	350mA / 1050mA
Einschaltstrom (A)	42
Dauer Einschaltstrom (µs)	168
Nennfrequenz (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Anzahl Leuchten pro 10A C Sicherung	15
Max. Anzahl Leuchten pro 16A C Sicherung	24
Max. Anzahl Leuchten pro 10A B Sicherung	9
Max. Anzahl Leuchten pro 16A B Sicherung	14
Überspannungsschutz (Differenzmodus --> L-N) (kV)	1

Physikalische Daten

Gehäusefarbe	Black
IP Schutzart	IP20
IK Schutzart	IK03
Länge (mm)	672
Breite (mm)	31
Nominale Produkthöhe (mm)	31.5
Gewicht (kg)	0.36

Pixo Line Driver DALI 600 Black

Artikelnummer 0007868

SYLVANIA

Packaging

EAN Code	5410288078687
Einzelverpackung Länge (cm)	68.0
Einzelverpackung Breite (cm)	5.0
Einzelverpackung Tiefe (cm)	3.7
DUN 14 (außen)	15410288078684
Anzahl an Einheiten je Außenverpackung	20
Außenverpackung Länge (cm)	70.0
Außenverpackung Breite (cm)	27.0
Außenverpackung Tiefe (cm)	17.0

Safety data

Glühdrahttest (°C)	650
Optimale Betriebstemperatur (°C)	-20-40