


LiFeSafe EXIT Sign EX W EM3 NM/MT ST

Code article 0032016

SYLVANIA


LiFeSafe™

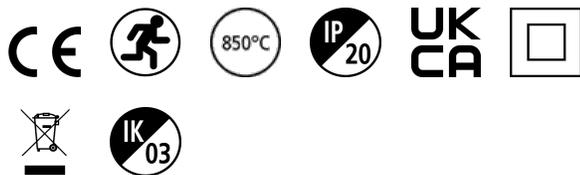

LiFeSafe EXIT EX W EM3 NM/MT ST is an ultra slim wall mounted self test exit sign with adjustable downlight. Non-maintained / maintained self-test 3Hr emergency with LiFePO4 rechargeable batteries. Comes with ISO7010 compliant legend pack. Arrow left, right, up and down.

Atouts techniques

Dimensions (mm)

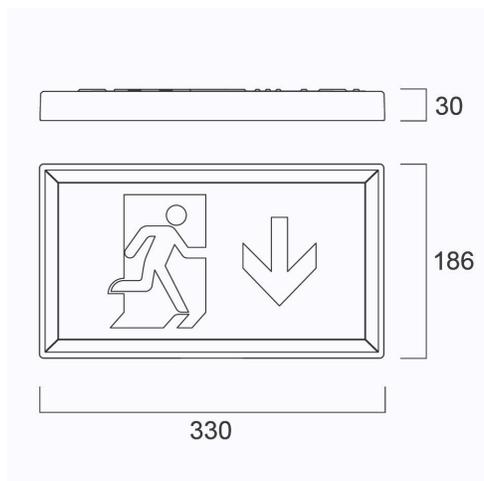

Photométrie

LiFeSafe EXIT Sign EX W EM3 NM/MT ST

Code article 0032016

SYLVANIA

Données générales

Nom du produit	LiFeSafe EXIT Sign EX W EM3 NM/MT ST
Technologie	LED
Housing	PC Polycarbonate
Montage	Wall surface mounted
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office
Operating temperature range (°C)	0°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001957
Warranty	5 ans

Données optiques

Luminaire efficacy (lm/W)	90
Température de couleur (K)	6500
Couleur de lumière	Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Flux lumineux (d'urgence) (lm)	90
Emergency duration (h)	3

Caractéristiques électriques

Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.4
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	228
Electrical protection	Class II
Control gear required	No
Courant d'appel (A)	6.8
Inrush Duration (µs)	100
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	179
Max. products per 13A C Breaker	233
Max. products per 16A C Breaker	287
Max. products per 20A C Breaker	358
Max. products per 10A B Breaker	125
Max. products per 13A B Breaker	163
Max. products per 16A B Breaker	201
Max. products per 20A B Breaker	251

Durée de vie

Lifespan L70 B50	100000
Lifespan L70 B20	100000
Lifespan L70 B10	100000
Lifespan L80 B50	83000
Lifespan L80 B20	70000
Lifespan L80 B10	68000
Lifespan L90 B50	40000
Lifespan L90 B20	34000
Lifespan L90 B10	33000

LiFeSafe EXIT Sign EX W EM3 NM/MT ST

Code article 0032016

SYLVANIA

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Longueur (mm)	330
Largeur (mm)	186
Nominal Product Height (mm)	30
Poids (kg)	0.654

Emballage

Product EAN number	5410288320168
Longueur simple de l'emballage (cm)	19.0
Largeur simple de l'emballage (cm)	4.2
Packaging single depth (cm)	33.5
DUN14 (inner)	15410288320165
Units per outer package	10
Packaging outer length / height (cm)	35.0
Packaging outer width (cm)	24.5
Packaging outer depth (cm)	40.0

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	0-45