

EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V

Artikelnummer 0046601

SYLVANIA


PROTM



The DALI emergency pack enables conversion of general lighting for emergency operation. It provides benefits by enabling testing and monitoring of an emergency lighting system either on-site or via an internet connection. The product defaults to standalone AutoTest when not connected to a DALI network. The pack is used for driving luminaires with forward voltages (Vf) of 6V to 55V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: 3W power consumption with approx 300 lumens light output, Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, SELV output. DALI functionality. Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Technische Werte

Größe (mm)

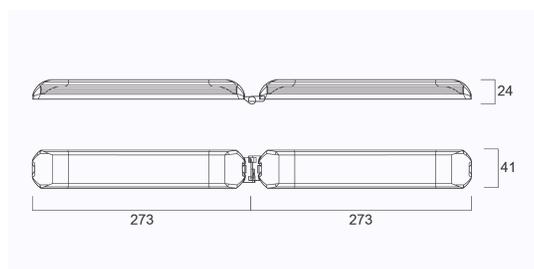

Photometrie

EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V

Artikelnummer 0046601

SYLVANIA

Allgemeine Daten

Produktname	EMERGENCY PACK SELF TEST/DALI MONITORING 6V-55V
Technologie	Emergency Pack
Allgemeine Anwendungsbereiche	Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Klasse	EC000471
Garantie	5 Jahre

Physikalische Daten

Gewicht (kg)	0.396
--------------	-------

Packaging

EAN Code	5410288466019
Einzelverpackung Länge (cm)	28.5
Einzelverpackung Breite (cm)	9.4
Einzelverpackung Tiefe (cm)	4.5
DUN 14 (außen)	05410288466019
Units per inner package	1
Anzahl an Einheiten je Außenverpackung	25
Außenverpackung Länge (cm)	44.1
Außenverpackung Breite (cm)	30.5
Außenverpackung Tiefe (cm)	30.5

Safety data

Nur für trockene Umgebungen	Ja
-----------------------------	----