

# ToLEDo Retro G95 806LM TW SST

Code article 0030105


**SYLVANIA**



Elegant glass LED filament lamp with tunable white, offering adjustable lighting for the perfect ambiance anytime, anywhere. Same size as traditional lamps, hassle-free upgrade to Smart energy-efficient LED lighting. Customise lighting from warm cosy to bright daylight (2000-6500K) to fit any mood or activity. Works effortlessly with SylSmart Home App, SylRemote, Amazon Alexa, Google Assistant and Siri Shortcuts for seamless control and convenience. Adjustable brightness from 1% to 100% with wireless dimming function for perfect illumination. Transform your space with diverse pre-set scenes for the perfect ambiance. Sparkling light effect.

## Atouts techniques

### Dimensions (mm)

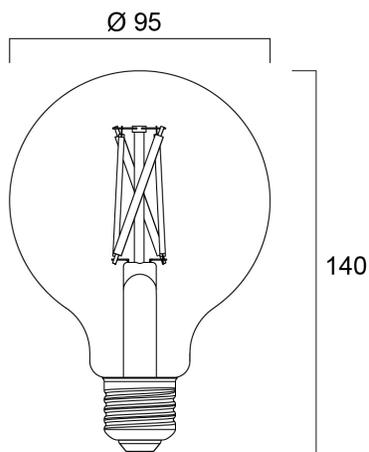

### Photométrie

# ToLEDo Retro G95 806LM TW SST

Code article 0030105

**SYLVANIA**

## Données générales

Nom du produit	ToLEDo Retro G95 806LM TW SST
Technologie	LED
Lamp shape	Round/globe
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	Amazon Alexa, Google Assistant
ETIM Class	EC001959
Numéro virtuel FI	4741194
Warranty	3 ans

## Données optiques

Useful luminous flux (Φuse)	806
Couleur de lumière	Homelight-Cool White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1

## Caractéristiques électriques

Power consumption (W)	7
Wattage (W)	7
Equivalent watt (W)	60
Actuel (A)	0.051
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	Yes
Courant d'appel (A)	2.9
Inrush Duration (µs)	735
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

## Durée de vie

Lifespan L70 B50	15000
------------------	-------

## Données physiques

IP rating	IP20
Longueur (mm)	140
Nominal Product Diameter (mm)	95
Poids (kg)	0.059

## Emballage

Product EAN number	5410288301051
Longueur simple de l'emballage (cm)	10.0
Largeur simple de l'emballage (cm)	10.0
Packaging single depth (cm)	15.8
DUN14 (inner)	15410288301058
Units per outer package	6
Packaging outer length / height (cm)	31.4
Packaging outer width (cm)	21.1
Packaging outer depth (cm)	16.8

## Sécurité

Condition de fonctionnement optimal (° C)	-20-40
Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures